

## Single Point Bench Scale

### FEATURES


- Rugged square structural tubing scale base
- USDA approved 304 stainless steel option
- Integral bubble level
- Compatible with all BLH Nobel transmitters, indicators, and network products
- Optional 304 stainless steel clamshell shield for load cell washdown protection

### APPLICATIONS

- Measure small batch additives
- Pilot plant vessel weighing
- Container filling systems
- Food/pharmaceutical processing


### DESCRIPTION

PLB bench scales are designed for high accuracy and repeatability in harsh industrial environments. Standard units are equipped with a stainless steel weighing surface, built-in shock and overload protection, and adjustable mounting feet with bubble leveling.

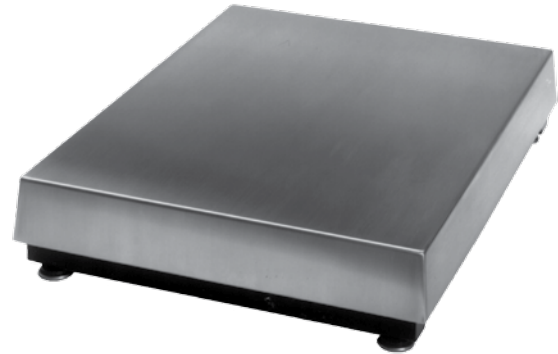

Low capacity 10" x 10" bench scales feature all stainless steel construction, including the scale base. Optionally, medium capacity scales are available with stainless steel base assemblies that meet USDA requirements and load cell "clamshell" shields for added protection in washdown environments.


### CONFIGURATION

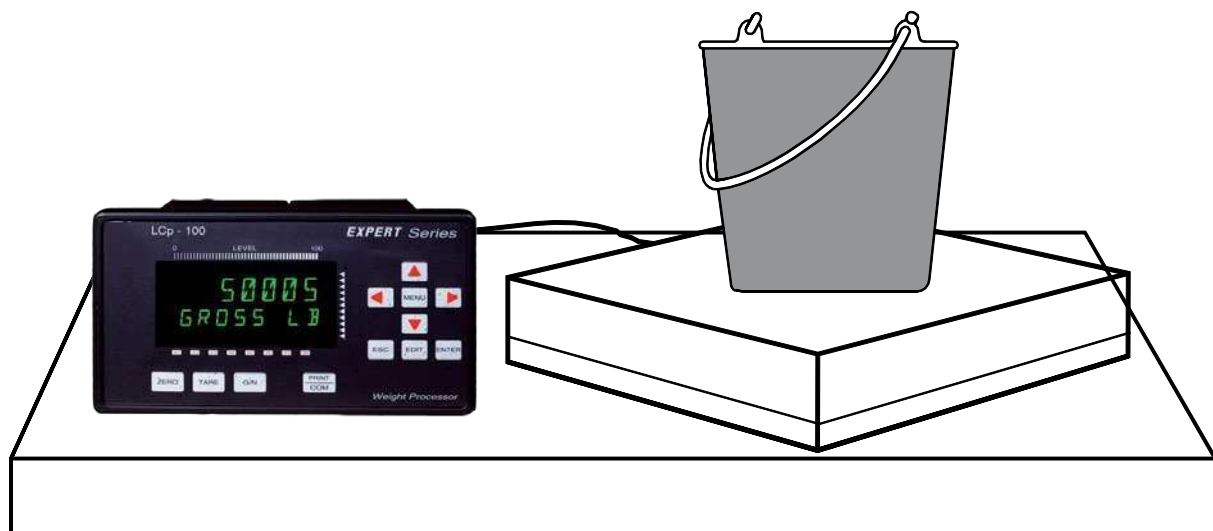


Single Point Bench Scale

SPECIFICATIONS	
PARAMETER	VALUE
Rated Output	0.91 mV/V
Repeatability	0.015% of rated output
Hysteresis	0.015% of rated output
Non-Linearity	0.015% of rated output
Creep	0.025% of rated output
Maximum Overload	200%
Overload Protection	5 point independently adjusted (shock absorbing spider 10" x 10")
Output Impedance	350 Ω (+3 Ω)
Input Impedance	415 Ω (+15 Ω)
COMPENSATED TEMPERATURE	
Range	+14°F to +122°F
Safe Temperature Range	-22°F to +158°F
Cable Length	10 ft – 6 wire shielded
Recommended Excitation	10 V
APPROVALS	
FM certified versions are available upon request. For details contact <a href="mailto:blhnobel@vpgsensors.com">blhnobel@vpgsensors.com</a> . <b>NOTE:</b> On a special order basis, units are available with approval for Class I and II, Division 1 hazardous areas.	

CABLE CONNECTION	
All models come with ten feet of color coded load cell cable. The color code for six- and four-wire connection is as follows:	
SIX-WIRE COLOR CODE	
COLOR	FUNCTION
Red	+ Signal
White	- Signal
Green	+ Excitation
Black	- Excitation
Blue	+ Sense
Brown	- Sense
Yellow/Bare	Shield

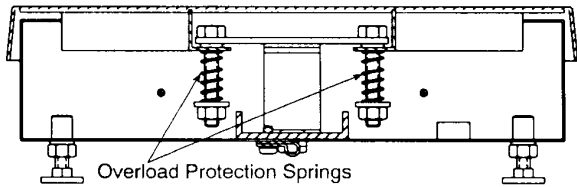DIMENSIONS		
		
SIZES	CAPACITY	HEIGHT
10" x 10"	5, 10, 15, 20 and 30 lb	3.15"
12" x 12"	30, 50 and 100 lb	3.62"
12" x 18"	50 and 100 lb	3.62"
18" x 18"	50, 100, 150, 200, 250, 300, 500 and 1000 lb	5.25"
18" x 24"	50, 100, 150, 200, 250, 300, 500 and 1000 lb	5.25"
24" x 24"	100, 150, 200, 250, 300, 500 and 1000 lb	5.25"

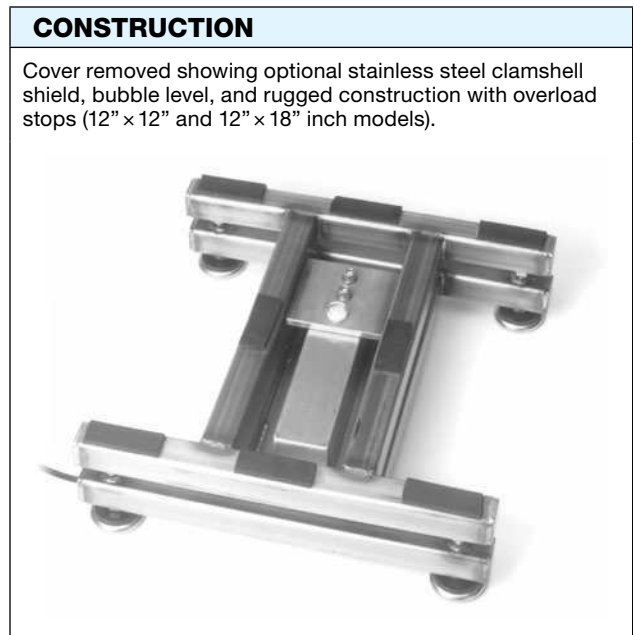

BLH Nobel is continually seeking to improve product quality and performance. Specifications may change accordingly.



## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at [vpgsensors.com](http://vpgsensors.com).

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.