

## Safe-Weigh® Process Weighing System



### FEATURES

- Patented synchronization techniques for digitized load cells
- Proactive diagnostics assure system performance
- Dynamic digital filtering
- 1 million count resolution per load cell

### OPTIONAL FEATURES

- 8 process setpoints
- Up to 4 analog current outputs
- DeviceNet, A-B Remote I/O, Modbus Plus, or Profibus interface capability

### DESCRIPTION

The LCp-104 System's patented synchronous digital measurement of multi-cell systems establishes the new benchmark in scale technology. True parallel data processing, with each update, guarantees real time continuous weight measurement unheralded in process weighing. Until now, inherent load shifting during weighing cycles, mixing, or reactions have restricted performance of independent load cell measurement systems. With synchronous measurement, each system update is correctly summed and the benefits of individual measurement are retained.


LCp-104 Process Weighing Systems individually digitize each transducer in a multi-cell system and display the resultant weight signals, live, on the console display. Measuring each individual load cell provides greater system resolution and accuracy, while facilitating on-line dynamic diagnostics throughout the system process. Unique diagnostic 'look-ahead' profiles alert operating personnel to potential system malfunctions, before they happen.

Dynamic Digital Filtering maximizes display stability and setpoint cutoff accuracy.

### APPLICATIONS

- Quality critical batch and blend systems
- Reactor vessels
- High value ingredient/product processing
- Fault tolerant - no down time requirements


### CONFIGURATION

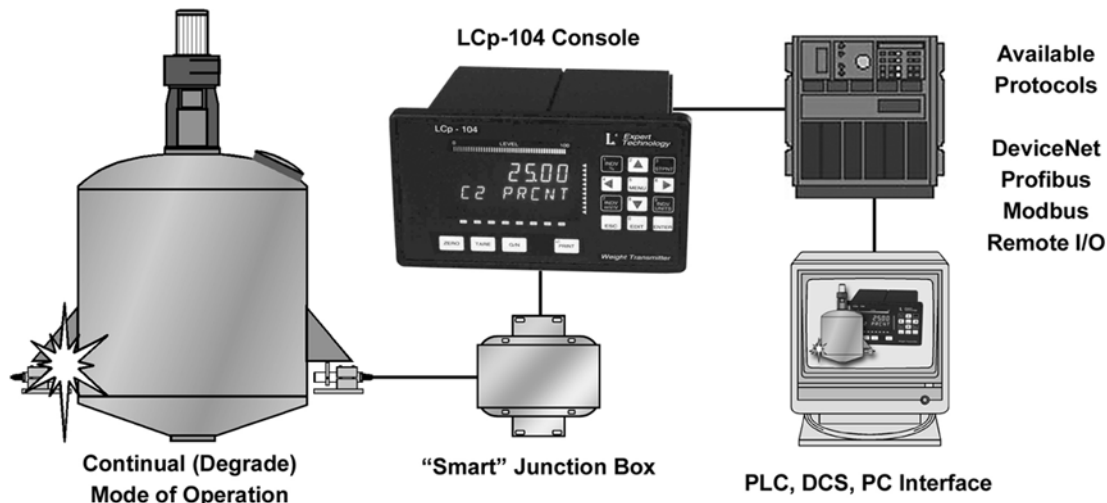


**L<sup>4</sup> TECHNOLOGY BASED DIGITAL WEIGHT PROCESSING**

**Sigma Delta A-D Conversion**

Very high-resolution weight data is obtained by using an individual Sigma Delta A-D converter for each transducer input. This new technology uses a high-speed integrator coupled with digital signal processing to produce a precision of up to one part in 1,000,000.

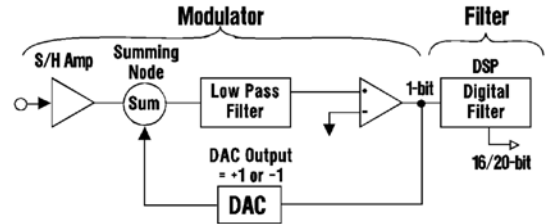


**Intuitive Digital Filter**




Combining new A-D technology with multi-channel control produces extremely precise internal weight information. Resultant data is sampled and evaluated statistically to determine the sample mean and standard deviation. This vital information is then used to optimize filter averaging and filter cutoff bands to maximize both data stability and response to true weight changes.

**Multi-Channel, Synchronous Signal Processing**

A patented method to control the timing of several dependent A-D converters with a single microprocessor allows for the use of individual transducer data without accumulated errors due to mass moving within a vessel. This capability makes it possible to individually digitize each transducer in a multi-cell system and achieve the benefits of additive resolution and system redundancy.

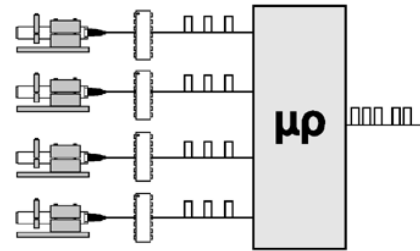


**Expert System Diagnostics**

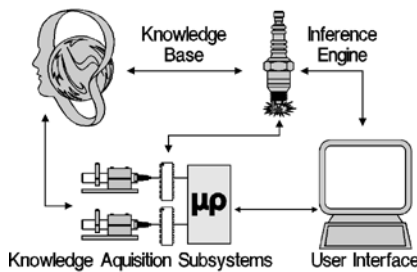




The LCp-104 uses the expert system concept to compare various measurements against known standards of acceptable performance and uses that relative comparison to identify and diagnose both transducer and system performance problems. The BLH expert system identifies piping influences, structural problems, transducer drift, cell overload, and the location and characteristics of process noise.

**Individual Load Cell 'LIVE' Displays**

Viewing individual load cells live, throughout the entire process, allows operating personnel to profile system trends or tendencies and adjust equipment for maximum performance. Although the total system may never overload, certain cells may experience overload or underload 'moments' which can affect cell integrity, longevity, and ultimately, product quality.



**OUTLINE DIMENSIONS**

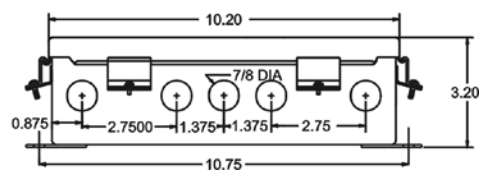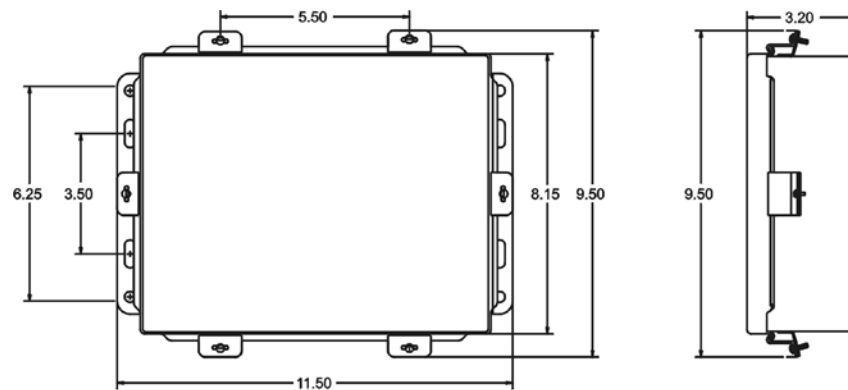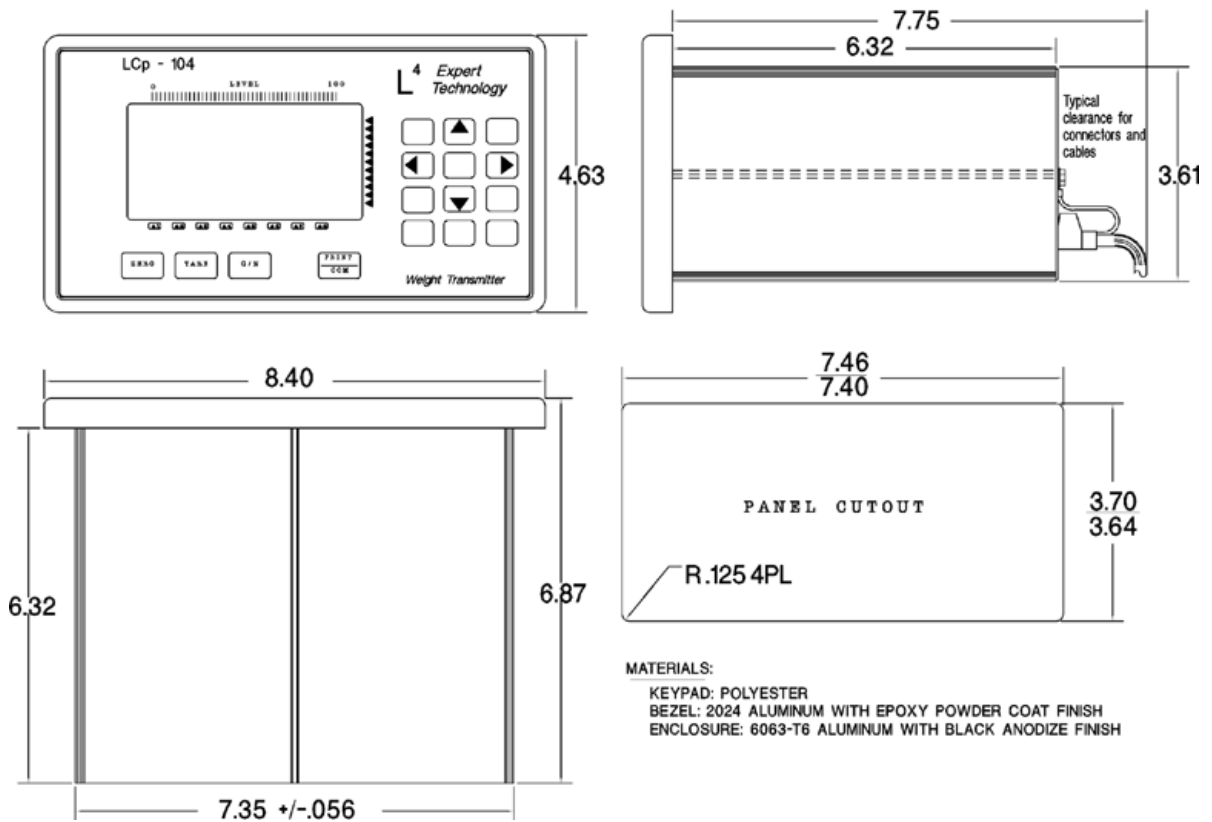

**SPECIFICATIONS**

**PERFORMANCE**

Internal Resolution	4,194,304 total counts
Max. Display Resolution	3,000,000 total counts
Max. Res. Per Channel	1,000,000 counts
Conversion Speed	33 msec (30 updates/sec)
Sensitivity (Noise)	0.001 1% full scale (max) (max ±16 counts w/o filter)
Full Scale Range	35 mV/channel
Dead Load Range	100%
Linearity	±0.0015% of full scale
Load Cell Excitation	10 V (65 mA/channel max)
Software Filter (Std.)	50 to 10,000 msec
Temperature Effects:	
Zero	±2 ppm/°C
Span	±7 ppm/°C
Remote Sense	user configurable, each channel
Calibration Repeatability	0.3 µV per count

**ENVIRONMENT**

Operating Temperature	-10 to 55°C (12 to 131°F)
Storage Temperature	-20 to 85°C (-4 to 185°F)
Humidity	5 to 90% rh, non-condensing

**DISPLAY/OPERATOR INTERFACE**

Type	high intensity cobalt green vacuum fluorescent
Active Digits	7 digit alpha numeric .59" high for weight: 8 digit alphanumeric .39" high for status

**ELECTRICAL**

Voltage	117/230 Vac +15% 50/60 Hz
Power	12 watts max
Input Impedance	10 M-Ohms, min. per channel
Step Response	one conversion cycle
Common Mode Rej.	100 db @ 60 Hz

**ISOLATED ANALOG OUTPUT (4 MAX, OPTIONAL)**

Type	16 bit digital to analog
Current	4-20 mA (600 ohm max load)

**DIGITAL INPUTS**

Logic'0' (Low) (min)	less than 0.5 Vdc, sink 3 mA
Logic'1' (High) collector)	10 to 28 Vdc (TTL open
Mechanical Relay'0'	closed (one side = digital common, the other side = input)
Mechanical Relay'1'	open (input internally pulled up)

**DC SETPOINT OUTPUTS - 8 (STANDARD)**

Type	open collector (current sinking)
Operating Voltage	5 - 35 Vdc
ON Voltage	1.2 Vdc @ 40 mA 0.8 Vdc @ 1 mA
OFF State Leakage Power	0.04 µA @ 40 Vdc external supply required

**AC SETPOINT OUTPUTS - 8 (OPTIONAL)**

Type	triac
Operating Voltage	12 -240 Vac
AC Frequency	20 - 500 Hz
ON State Voltage Drop	1.2 Vrms
Min - Max Load Current	5 mA - 1 A
Leakage Current	1 mA @ full rated load voltage
Power	external supply required

**NETWORK SERIAL COMMUNICATION (STANDARD)**

Type	RS-485 Half Duplex (Multi-Drop)
Baud	9.6K, 28.8K and 56.7K
Data Format	proprietary

**SIMPLEX DATA OUTPUT (STANDARD)**

Type	RS-485 (Simplex)
Baud	1200 or 9600
Data Format (Selectable)	
ASCII	7 data bits, even parity, stop bit

**TERMINAL/COMPUTER INTERFACE (OPTIONAL)**

Interface Type	RS-485 half duplex (standard)
Baud	1200 or 9600
Protocol	duplex command/response format
ASCII	7 data bits, even parity, stop bit

**SPECIAL PROTOCOLS (OPTIONAL)**

Modbus	RTU Protocol
--------	--------------

**SPECIAL INTERFACE (OPTIONAL)**

Allen Bradley	Remote I/O - 1/4 logical rack
Modbus Plus	peer-to-peer (with global data)
Profibus	slave
DeviceNet	slave

**ENCLOSURE**

Dimensions (Console)	4.63 x 8.40 x 6.5 in. HxWxD
Weight (Console)	5.4 lb
Dimensions (J-Box)	9.5 x 11.5 x 3.2 in. HxWxD
Weight (J-Box)	5.6 lb

**APPROVALS**

FM (Factory Mutual)	3611 (Class I, II, III; Div.1,2; Groups A-G)
CSA	C22.2 (Class I, II,III; Div.1,2; Groups A-G)

**NOTE:**

PLC and Allen-Bradley are trademarks of Allen-Bradley Co.,Inc.  
Modbus is a trademark of Schneider Automation.  
Profibus is a trademark of Siemens.  
DeviceNet is a trademark of ODVA  
Safe-Weigh is a trademark of BLH

BLH is continually seeking to improve product quality and performance. Specifications may change accordingly.



## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at [vpgsensors.com](http://vpgsensors.com).

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.