

## “Expert” Weight Transmitter

### FEATURES

- 1 Million count resolution, 20 updates per second
- Plug-n-Weigh® set-up for easy installation
- Dynamic digital process filtering
- Real time system & loop diagnostics
- Optional
  - Expansion slot for DeviceNet, Modbus Plus, Modbus RTU, Profibus DP, or AB Remote I/O interface
  - High resolution (16 bit) analog output
  - Optional 120 updates per second

### APPLICATIONS

- Batch & mix systems
- Reactor vessels
- Ribbon blenders
- Process weighing and control systems

### DESCRIPTION


The LCp-100 is a high performance weight indicator and transmitter with features and options focused on the requirements of precision, high-speed process weighing applications. It is compatible with all strain gage type load cells and is designed to easily connect to any PLC, DCS, or PC based process control system. Special design emphasis has been placed on simplicity, reliability, and expandability. Transmitter outputs offered include an RS-422/485 digital serial communication port, and 16 bit derived analog current output.



Units are equipped with an expansion slot for installing a wide range of specialized digital interfaces such as DeviceNet, Profibus, AB Remote I/O, and Modbus Plus.

The LCp-100 Safe-Weigh® Software System encompasses over 50 years of BLH Nobel application expertise. Plug-n-Weigh® quick calibration and setup procedures save time, money, and even field service calls. Internal diagnostics continuously monitor weigh system performance and alert service personnel to potential problems, before they happen.

### CONFIGURATION

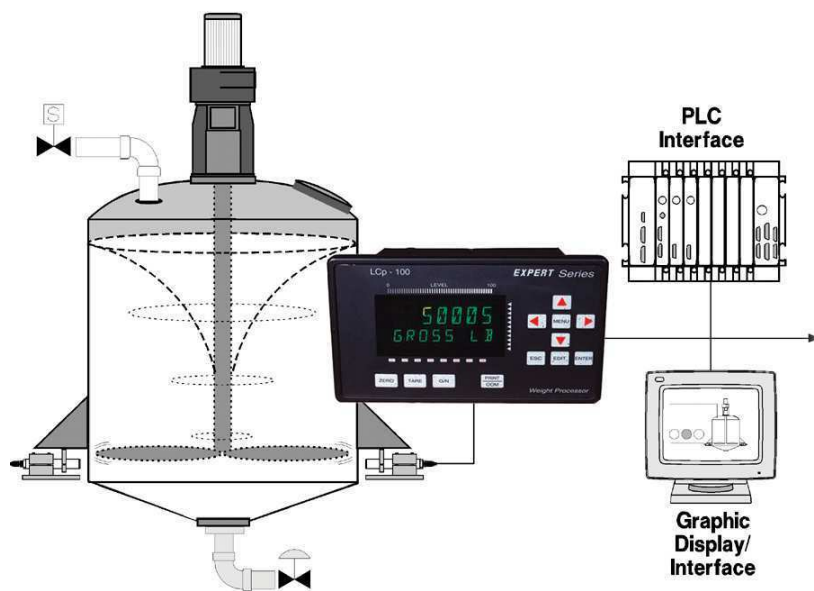

#### Available Outputs

- DeviceNet
- Profibus
- Modbus Plus
- Modbus RTU
- Allen-Bradley Remote I/O
- Digi-System Plus Network
- ASCII Serial
- 4-20 mA Analog

## “Expert” Weight Transmitter

### DESCRIPTIONS OF FEATURES

#### Plug-n-Weigh® Technology

Plug-n-Weigh® technology minimizes start-up time while significantly reducing the operator learning curve. Intuitive configuration menus, self-configuration of many set-up parameters, and simple push-button type digital calibration combine together to make the LCp100 easy to install and operate.



#### Safe-Weigh® Software System

Safe-Weigh® Software System advantages include Expert System Diagnostics, Dynamic Digital Filtering, and a wide range of proven DCS/PLC connectivity options. Expert System Diagnostics generate on-line preventative maintenance signals, which quickly identify potential electrical/mechanical failures. Dynamic Digital Filtering ensures stable weight data and precise, repeatable setpoint control in dynamic process environments.



### DESCRIPTION OF OPTIONAL FEATURES


#### Communications and Interfacing

LCp-100 instruments are designed for fast, easy interfacing with virtually any PLC or DCS system. LCp-100 instruments are the first weight transmitters available with

Schneider, Modbus Plus Network communication. Also, as a licensed partner in the Allen-Bradley Encompass program, BLH Nobel offers Remote I/O capability in all LCp products. Other easy digital interfaces are available for DeviceNet, Siemens Profibus, Honeywell TDC 3000, GE series 90 PLC's, and Fisher Rosemount (Provox).

For cost effective local area network applications, units may be ordered with BLH Nobel Digi-System Plus protocol for communication to a PLC or DCS via an LCp-400 Gate-Weigh controller.

### OUTLINE DIMENSIONS

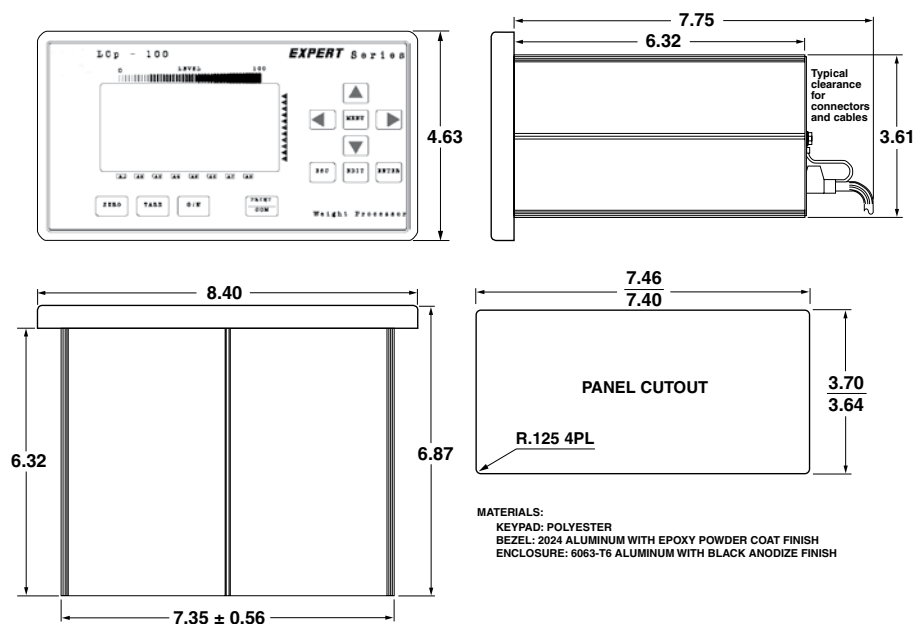

### “Expert” Weight Transmitter

SPECIFICATIONS			
PARAMETER	VALUE	PARAMETER	VALUE
<b>PERFORMANCE</b>		<b>REMOTE DIGITAL INPUTS (OPTICALLY ISOLATED) (CONTACT CLOSURE OR DO LOGIC COMPATIBLE)</b>	
Resolution	1,048,576 total counts	Closed (Momentary)	Logic low
Displayed Resolution	700,000 counts	Open	Logic high
Conversion Speed	50 ms	Cable Length	100 feet max.
Displayed Sensitivity	0.05 $\mu$ V per count	<b>COMMUNICATIONS (STANDARD)</b>	
Full Scale Range	$\pm 3.5$ mV/V	Serial RS-422/485	Full or half duplex BLH Nobel Digi-System Plus Network, ASCII
Dead Load Range	100% full scale	Optional Protocols	Provox, or Modbus RTU odd, even or no parity-selectable
Linearity	$\pm 0.0015\%$ full scale	Baud Rates	300, 1,200, 2,400, 4,800, 9,600, or 19,200
Excitation Voltage	10 VDC @ 250 mA	Addressing	0–99
Software Filter	Multi-variable up to 10,000 ms	<b>SPECIAL INTERFACES (OPTIONAL)</b>	
Temp Coefficient Zero	$\pm 2$ ppm/ $^{\circ}$ C max.	Allen-Bradley	Remote I/O – 1/4 Logical Rack
Temp Coefficient Span	$\pm 7$ ppm/ $^{\circ}$ C max.	Modbus RTU	Slave
Step Response	One conversion cycle	Modbus Plus	Peer-to-peer (supports global data)
<b>ENVIRONMENT</b>		Profibus	Slave
Operating Temperature	–10 to 55 $^{\circ}$ C (15 to 131 $^{\circ}$ F)	DeviceNet	Slave
Storage Temperature	–20 to 85 $^{\circ}$ C (–5 to 185 $^{\circ}$ F)	<b>ENCLOSURE</b>	
Humidity	5 to 90% rh, non-condensing	Dimensions (Std.)	4.63 $\times$ 8.40 $\times$ 6.5 in H $\times$ W $\times$ D
<b>DISPLAY</b>		NEMA 4/4X, 12 (Opt.)	8.5 $\times$ 13.5 $\times$ 10.45 in H $\times$ W $\times$ D
Type	High intensity amber LED display	Weight	5.4 lb
Active Digits	7 digit alpha numeric 0.59 in high for weight; 8 digit alphanumeric 0.39 in high for status	<b>MATERIALS</b>	
<b>ELECTRICAL</b>		Aluminum Case & Bezel overlay meets 94V-0 rating	
Voltage	117/230 VAC $\pm 15\%$ @ 50/60 Hz	<b>APPROVALS</b>	
Power	15 W max.	FM (Factory Mutual)	3611
Input Impedance	10 m $\Omega$ min.	CSA	C22.2 (all applicable sections)
Noise	0.4 $\mu$ V/count (min. filt. setting)		
<b>ANALOG OUTPUT</b>			
Conversion	16 bit D-A		
Current Selectable	4–20 mA or 0–20 mA — 600 $\Omega$ max., 0–24 mA — 500 $\Omega$ max.		

**NOTE:** PLC and Allen-Bradley are trademarks of Allen-Bradley Co., Inc. Modbus is a trademark of Schneider. Profibus is a trademark of Siemens. DeviceNet is a trademark of ODVA. Plug-n-Weigh is a trademark of BLH Nobel. Safe-Weigh is a trademark of BLH Nobel.

BLH Nobel is continually seeking to improve product quality and performance. Specifications may change without notice.

## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase.

**To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at [vpgsensors.com](http://vpgsensors.com).

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.