

## Remote Displays

### FEATURES

- Digit-for-digit weight/tension indication from a master LCp-100 or LCp-200 indicator/transmitter
- Simple installation – no calibration required
- Can be located 2000 feet from the transmitting device
- Panel mount or optional NEMA 4/4X enclosure
- FM approved, CE marked, and CSA certified

### APPLICATIONS

- High resolution remote display

### DESCRIPTION


BLH Nobel Remote Digital Displays receive and display serial ASCII data transmitted by a host LCp-100, LCp-200 series weight indicator/ transmitter. Operating on supplied data, the Remote Display precisely duplicates the weight/tension value display of the host device. Indication also includes gross, net, and rate information.

Units require only a twisted pair of wires for interconnection and mount up to 2,000 feet from the host device. Remote Display units are ideally suited for applications where analog panel meter resolution is not adequate. Analog displays present only an approximation of actual weight data whereas serial communication guarantees digit-for-digit replication. Precision accuracy, easy installation, and optional NEMA or explosion-proof enclosures make these units the perfect choice for plant or control room remote display.




Front panel ZERO and TARE keys transmit push to zero and tare commands to the host device. The G/N (gross-net-rate) key, however, functions independently from the host device. For example, a remote LCp-200R unit can display net weight or rate while the host LCp-200 displays gross weight.

### CONFIGURATION

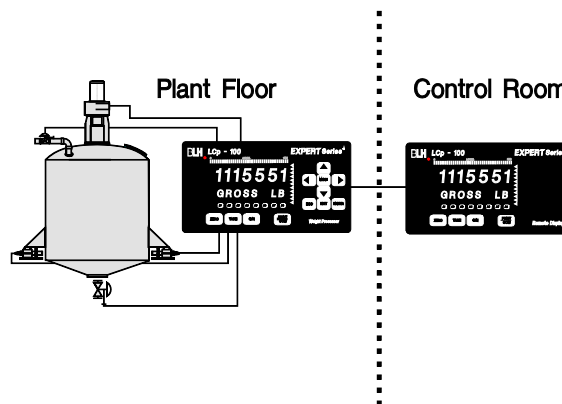

Remote Displays

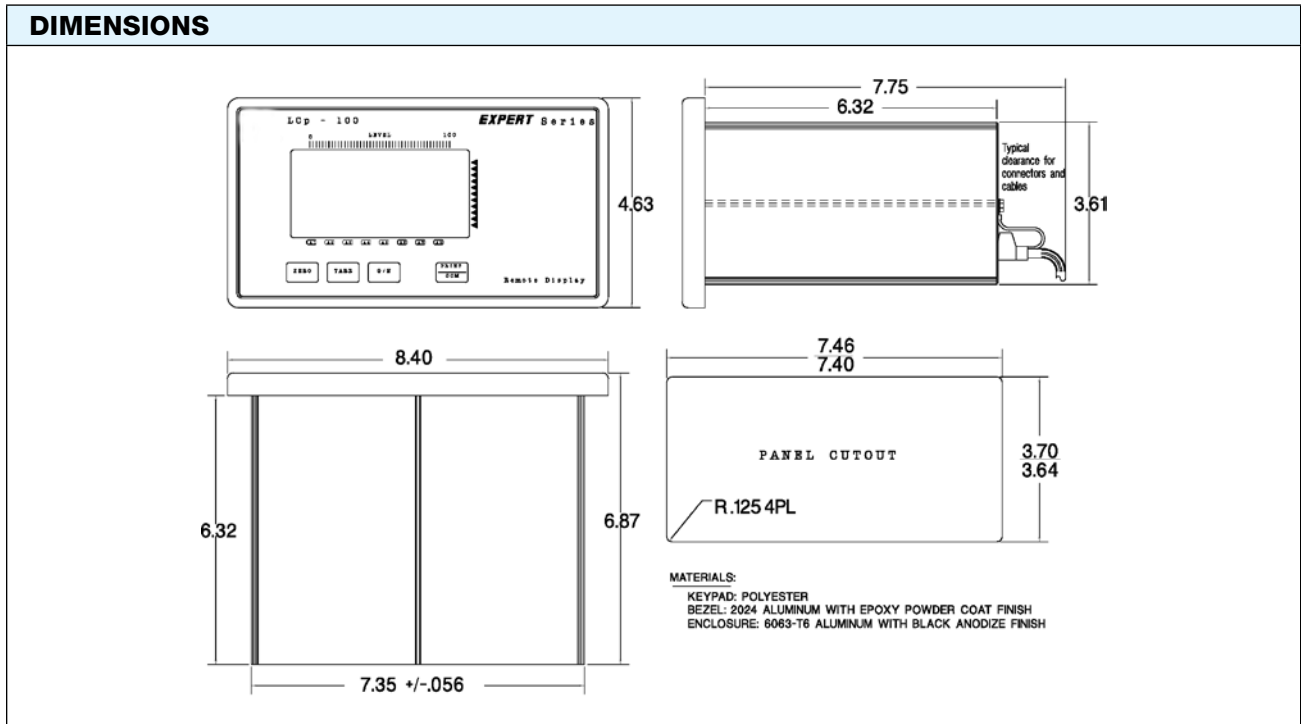

PARAMETER		VALUE	PARAMETER		VALUE
<b>PERFORMANCE</b>					
<b>Display</b>		High intensity amber LED display	<b>ENCLOSURE</b>		
<b>Active Digits</b>		7 digit alpha numeric 0.59 in high for weight: 8 digit alpha numeric 0.39 in high for status	<b>Dimensions (Std.)</b>		4.63 x 8.40 x 6.5 in H x W x D
<b>ENVIRONMENT</b>			<b>NEMA 4/4X, 12 (Opt.)</b>		8.5 x 13.5 x 10.45 in. H x W x D
<b>Operating Temperature</b>		-10 to 55°C (15 to 131°F)	<b>MATERIALS</b>		
<b>Storage Temperature</b>		-20 to 85°C (-5 to 185°F)	<b>Aluminum Case / Bezel</b>		Overlay meets 94V-0 rating
<b>Humidity</b>		5 to 90% rh non-condensing	<b>COMMUNICATIONS</b>		
<b>Voltage</b>		117/230 VAC ± 15% @ 50/60Hz	<b>Serial RS-485</b>		Two wire, half duplex
<b>Power</b>		15 W max.	<b>Baud Rate</b>		9,600
<b>Parameter Storage</b>		Flash EPROM	<b>APPROVALS/CERTIFICATIONS</b>		
			<b>FM (Factory Mutual)</b>		3611
			<b>CSA</b>		C22.2 (all applicable sections)

BLH Nobel is continually seeking to improve product quality and performance. Specifications may change without notice.



## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at [vpgsensors.com](http://vpgsensors.com).

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.