

Gate-Weigh® LAN Controller

FEATURES

- Single port communication interface for multiple transmitters/indicators
- Constant update and storage of node data eliminates polling/response delay time
- Modbus Plus or RTU protocol and Allen-Bradley Remote I/O
- Self-configuring BLH Nobel Digi-System Plus Network

APPLICATIONS

- Plant-wide weigh system LAN
- Controller
- 16 system interface with PLC or DCS systems

DESCRIPTION

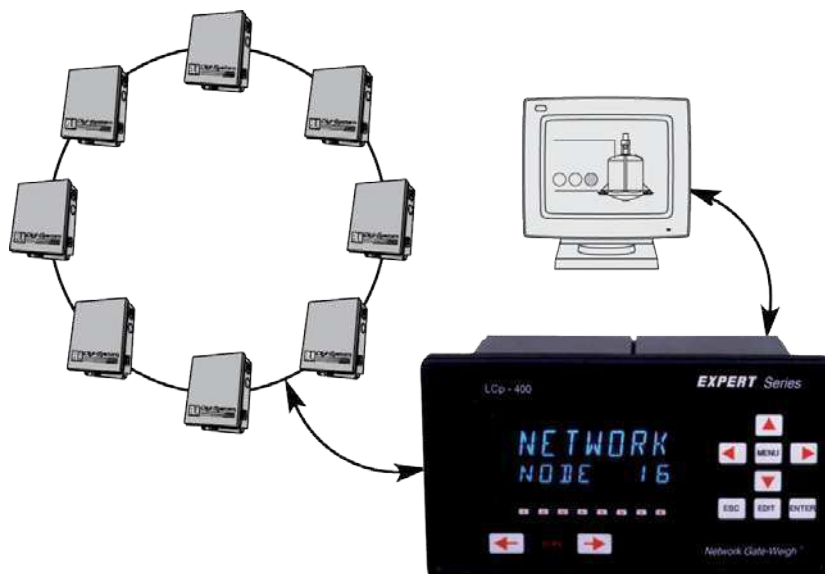
The LCp-400 Gate-Weigh is a multi-scale local area network controller and communication gateway. This network bridge device uses BLH Nobel Digi-System Plus network communication technology to continuously scan up to 16 weigh system nodes and is equipped with an Allen-Bradley Remote I/O or Modbus Plus network port output. The LCp-400 is also available with a conventional MODBUS RTU serial output.

Digi-System Plus network is a self configuring, enhanced RS-485 based communication link that operates at a rate of 57.6 Kbps over distances of up to 4000 ft. Operationally, the LCp-400 scans each node on the network continuously and updates internal register locations with current weigh, diagnostics and status data. Through the gateway port, a host PLC, PC or DCS can perform read/write commands to retrieve data without polling and response delays typical in other multi-drop network arrangements.



In addition to the network communication and gateway functions, the LCp-400 is also a centralized scanning terminal that displays weight & status information from any node on the network. Currently, the LCp-400 Digi-System Plus network is compatible with the LCp-100 Indicator/Transmitter, LCp-200 Indicator Controller, DXp-40 Transmitter, and PS-2010 Controllers.

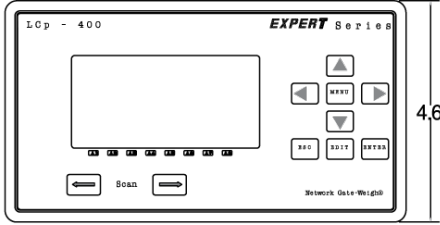
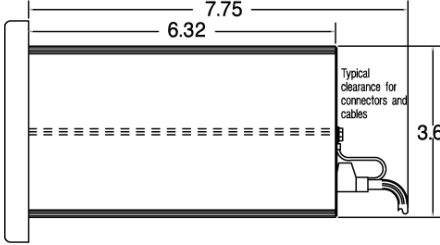
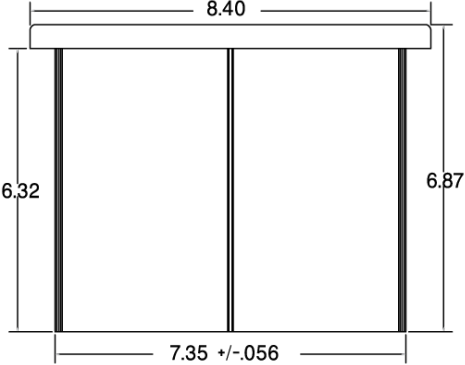
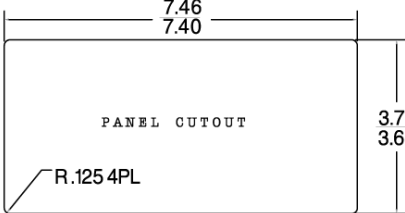
CONFIGURATION



Gate-Weigh® LAN Controller

SPECIFICATIONS	
PARAMETER	VALUE
DISPLAY	
Type	high intensity amber LED display
Active Digits	7 digit alpha numeric 0.59 in high for weight: 8 digit alpha numeric 0.39 in high for status
ENVIRONMENT	
Operating Temperature	-10 to 55°C (15 to 131°F)
Storage Temperature	-20 to 85°C (-5 to 185°F)
Humidity	5 to 90% RH non-condensing
Voltage	117/230 VAC ±15% @ 50/60 Hz
Power	15 W max.
ENCLOSURE	
Dimensions (std.)	4.63×8.40×6.5 in H×W×D
NEMA 4/4X, 12 (opt)	8.5×13.5×10.45 in H×W×D
MATERIALS	
Aluminum case and bezel overlay meets 94 V-0 rating	

PARAMETER	VALUE
BLH DIGI-SYSTEM PLUS NETWORK	
Serial RS-485	two wire
Baud Rates	9600, 28800, or 57600
Protocol	proprietary
Addressing	up to 16 nodes
GATEWAY INTERFACES	
Allen-Bradley	remote I/O – ¼ logical rack
Modbus RTU	slave
Modbus Plus	peer-to-peer
APPROVALS/CERTIFICATIONS	
FM (Factory Mutual)	3611 (Class I, II, III; Div.1,2; Groups A-G)
CSA	C22.2 (Class I, II,III; Div.1,2; Groups A-G)

DIMENSIONS	
	
	
	
	
<p>MATERIALS: KEYPAD: POLYESTER BEZEL: 2024 ALUMINUM WITH EPOXY POWDER COAT FINISH ENCLOSURE: 6063-T6 ALUMINUM WITH BLACK ANODIZE FINISH</p>	

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase.

To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.