

Dual Axis Web Tension Transducer

FEATURES

- Capacities from 2k to 20k lb (9 to 89 kN)
- Dual axis transducer design enables measurement of resultant force in all directions without limitation to horizontal or vertical components
- Functional to 250°F (121°C)
- Sealed to IP67 – field proven design
- Low profile – direct load cell replacement with simple retrofit installation
- Factory calibrated for minimum start-up time



DESCRIPTION

Patented HTU Web Tension Transducers measure web tension forces applied across a roll, using integral horizontal and vertical axis sensors. This innovative and exclusive two-dimensional approach to web tension force measurement enables accurate determination of the true resultant force, as well as the applied angle. Not only does this permit installation and measurement at any mounting angle or roll orientation, it also combines to form an expert diagnostics system that produces the highest level of web tension measurement confidence available today.

The Model HTU is machined from a high strength corrosion resistant stainless steel to yield a low profile single piece construction that incorporates tubular sensing sections at each end. Two full Wheatstone Bridges are mounted internally to each sensor and provide output signals in the X and Y plane that are externally, vectorially summed to determine the magnitude and direction of the resultant force. Each bridge is functional to 250°F (121°C), and dead weight calibrated for precision accuracy. The cylindrical sensing sections are sealed to meet IP67 requirements. Environmental sealing ensures long-term reliability for humid, wet, or washdown locations.

APPLICATIONS



Paper and Roofing Machines



Strip Mill Force Measurement


Dual Axis Web Tension Transducer

HTU DESIGN ADVANTAGES

The HTU Load Cell incorporates a symmetrical, universal design that measures the resultant force F_R and angle θ of any web tension system, independent of wrap angle, with a horizontal or vertical installation. Special orientation or the selection of a horizontal or vertical transducer is not required.

Force sensing elements located on each end of the transducer measure the components F_x and F_y of F_R applied along the X and Y axes. Resultant output signals can be used to determine the magnitude and direction (θ) of the overall force (F_R) applied by the web. Two full Wheatstone Bridges are mounted internally to each tubular cross section to provide independent sensing for each axis as well as protection from hostile environments.

HTU transducers are typically installed beneath the pillow blocks using top and bottom adapter plates. These plates mount on integral loading surfaces designed to produce shear forces in the sensing

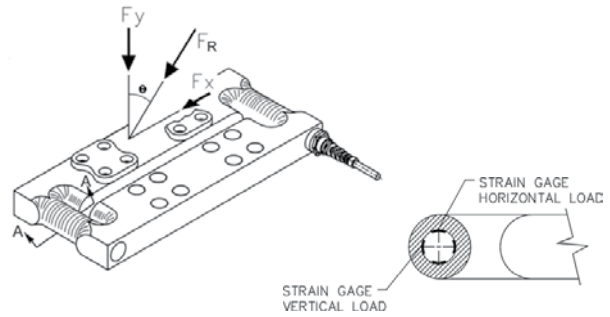


Force sensing gage diagram (for both ends of module)

element. Loading surfaces are located on either side of the longitudinal center slot and include drilled and counterbore holes to maintain a low profile assembly.

SPECIFICATIONS


PARAMETER	VALUE
PERFORMANCE (% RATED OUTPUT)	
Available Capacities	2k, 6k, 10k, 20k lb (9, 27, 45, and 89 kN)
Rated Output (RO)	2.0 mV/V (X and Y bridges)
Repeatability	0.02% RO
Combined Error (best fit)	0.10% RO
Zero Balance	1.0% RO
Creep (20 Minutes)	0.05% RO
Temperature Effects: Zero Balance	0.0025% RO/°F (0.0044%/°C)
Output - % Reading	0.0050% RO/°F (0.0089%/°C)
ELECTRICAL	
Excitation Voltage	10 VAC-DC recommended 15 VAC-DC maximum
Input Resistance	185 ±10.0 Ω (all channels)
Output Resistance	500 ±5.0 Ω (per channel)
Connection	high temperature, 6-cond. cable, 33 ft (10 m)
TEMPERATURE	
Safe Temperature	±0 to +300°F (-18 to +149°C)
Service Temperature	±0 to +250°F (-18 to +121°C)

PARAMETER	VALUE
ADVERSE LOAD RATINGS	
Safe Load	150% rated capacity
Ultimate Load	300% rated capacity
Safe Sideload	100% capacity @12 in (304 mm) C/L height
Ultimate Sideload	300% rated capacity
MATERIAL	
HTU Cell	17-4PH stainless steel
Adapter Plates	mild or stainless steel
SEALING	
Environmental Rating	IEC IP67
DEFLECTION	
2000 lb Unit	0.007 in (0.17 mm)
All others	0.035 in (0.89 mm)
WEIGHT AND MOUNTING	
Weight	all capacities - 18 lb (8.2 kg)
Mounting	horizontal or vertical

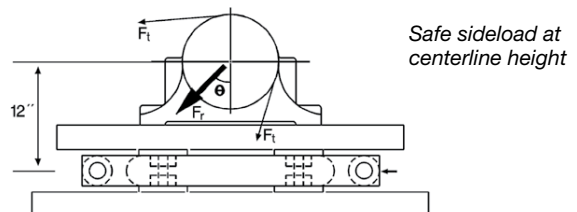


Dual Axis Web Tension Transducer

OUTLINE DIMENSIONS – 2000 lb (9 kN) in inches (millimeters)

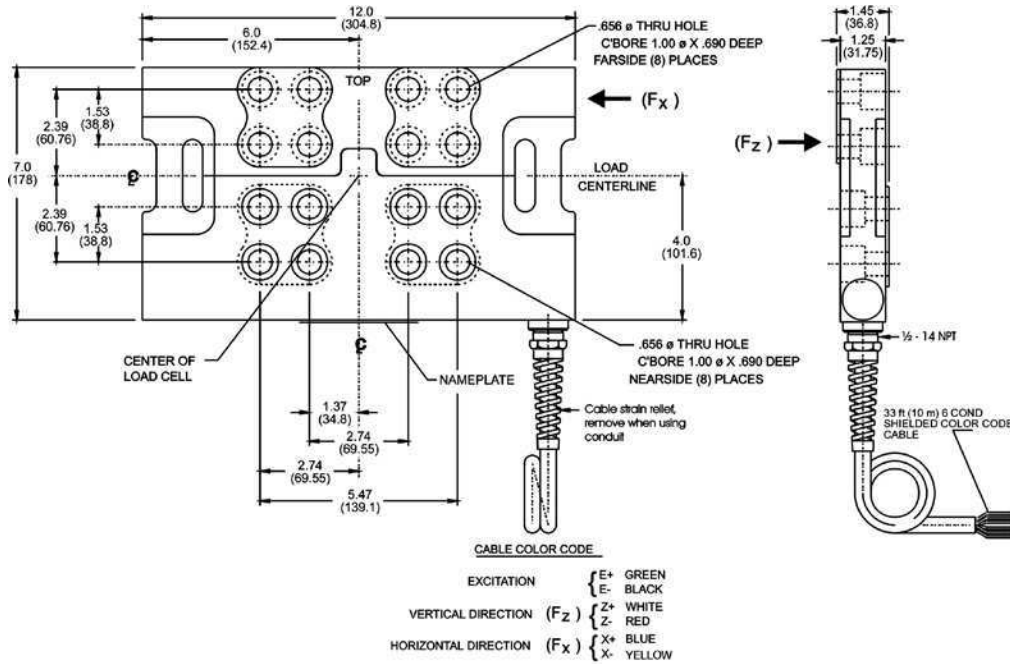

OUTLINE DIMENSIONS: ALL OTHER CAPACITIES in inches (millimeters)

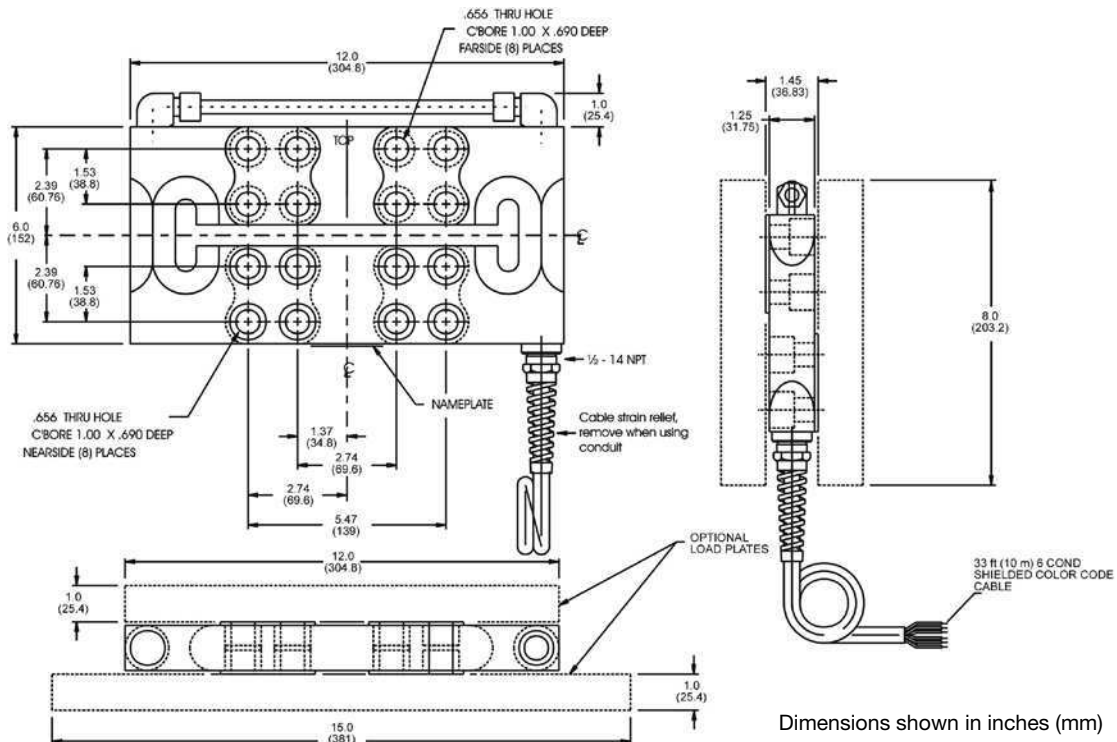

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.