

Web Tension Measurement Unit

FEATURES

- Measure full resultant web tension force
- Superior accuracy for heavy rolls with small wrap angles
- Low profile—minimal change in line profile when retrofitting existing equipment
- Units customized to fit existing applications—no reconstruction and adaptors required

OPTIONAL FEATURES

- High temperature units—functional to 100°C
- Special units designed to meet any application need


APPLICATIONS

- Paper machines
- Steel strip tension equipment
- Mining conveyors
- Felts, dryers, calenders, coaters, and laminators
- Winders and rewinders

DESCRIPTION

FMU applications include all zones on paper processing machines and steel mill strip tension equipment.

Each FMU consists of two precision load cells, a load plate that carries the pillow block, and a base plate that mounts to the machine support. The unique design of the FMU allows measurement of the resultant web tension force without the need to mount the entire assembly on a sloped support. Because the load cells are cylindrical, they can be rotated to measure in the direction of the exact resultant force.

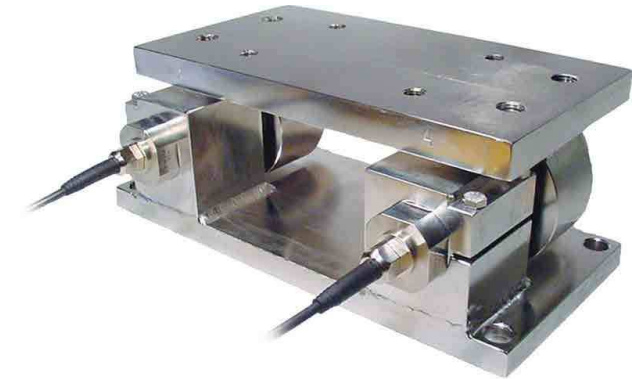


Measuring the resultant force rather than a vertical or horizontal component assures the highest possible accuracy and eliminates wrap angle restrictions.

Tension signals from the FMU feed directly into a web tension transmitter which provides load cell excitation and a communication interface for the host PLC/DCS system.

Whether you are using standard products or customized solutions, our highly skilled system engineers, service technicians, and flexible production sites can meet your demands with a high level of professionalism.


CONFIGURATION

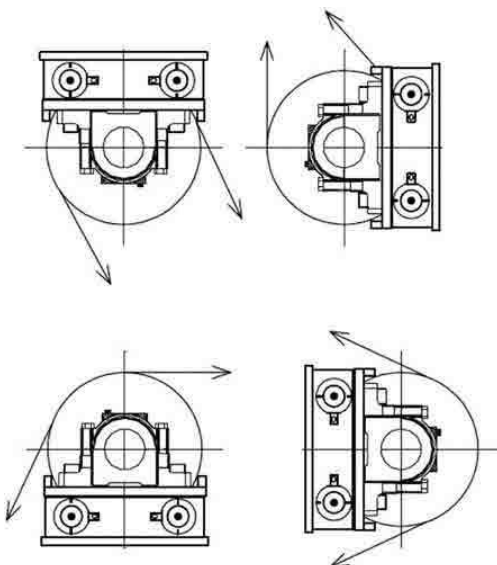

Web Tension Measurement Unit


OUTLINE DIMENSIONS

Typical dimensions FMU-1:

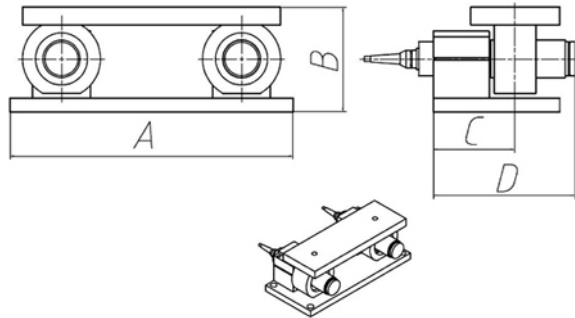

CAPACITY	A (mm)	B (mm)	C (mm)	D (mm)
2, 4, 10 kN	320	110	94.5	150
20, 40, 60 kN	380	140	110	190.5
100 kN	570	175	157	268
200 kN	640	219	167	292.5

Typical dimensions FMU-5:

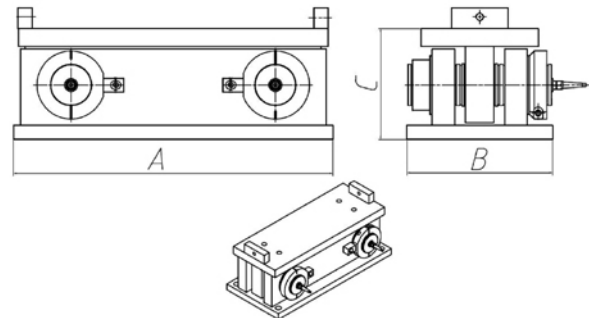

CAPACITY	A (mm)	B (mm)	C (mm)
100, 200 kN	480	260	205
400 kN	680	310	236

SPECIFICATIONS

PARAMETER	VALUE	
PERFORMANCE		
Typical technical data	FMU-1	FMU-5
Capacity	2 kN to 200 kN	100 kN to 400 kN (800 kN**)
Accuracy error/repeatability	Better than 0.1% RO	Better than 0.1% RO
Accuracy error/repeatability (with one dummy load cell)	Better than 0.5% RO	Better than 0.5% RO
Input voltage recommended	5–10 VDC or VAC	5–10 VDC or VAC
Input voltage maximum	18 VDC or VAC	18 VDC or VAC
Rated output (RO)	2 mV/V	2 mV/V
Temperature range**	–40°C to +80°C (100°C*)	–40°C to +80°C (100°C*)
Electrical connection	Shielded four conductor cable or connector	
Materials	Yellow chromate zinc plated steel or stainless steel	

* Option available

** Higher values available upon request

BLH Nobel engineers are capable of customizing FMU transducers to meet all application needs.

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase.

To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.