

Transmitter

FEATURES

- Analog output ± 10 VDC, ± 20 mA, 0–20 or 4–20 mA
- Serial communication: RS-485, MODBUS RTU protocol
- Fieldbus interface: Profibus DP (certified)
- Tare, Gross/Net and Zero function (power failure safe)
- Internal resolution $> 8,000,000$ counts
- Relay outputs (level mode/setpoint mode)
- Compact DIN rail mounting
- CE compliant – EMC and Low Voltage

DESCRIPTION

WST 3 Transmitters are high performance, DIN rail-mounted instruments designed for strain gage based transducer applications. They convert load cell(s) input signals into highly stable analog and digital output signals suitable for PC or PLC based control systems.

WST 3 Transmitters typically are used where a local display is essential either for weight/force indication or front panel setup. Setup and calibration procedures are accomplished easily using the front panel or by using PC based deltaCOM software running under Windows 95/98/2000/NT4/ME/XP/Windows 7/Windows 8/Windows 10. All setup data can be stored in a host computer and quickly downloaded into another WST 3 replacement unit with PC software delatCOM.

Units are equipped with two relay outputs having a response time of less than 20 ms. for use in high accuracy, level control applications.

A unique and patented A/D converter, of high resolution and stability, serves as the heart of the transmitter. This advanced A/D drives both the analog and serial outputs which can be user configured to transmit rapid, accurate, and stable weight/force measurements.




WST 3 Transmitters offer on-board fieldbus communication using the Profibus DP format. Fieldbus versions of Profibus DP, DeviceNet, and Modbus Plus also are available through the GATE 3S network module from BLH Nobel.

WST 3 Transmitters are compatible with other BLH Nobel instruments and communicate via standard RS-485/MODBUS RTU protocol with a common process control host – PC/PLC.

The transmitter is CE marked, and fully compliant with EMC and Low Voltage directives.

CONFIGURATION

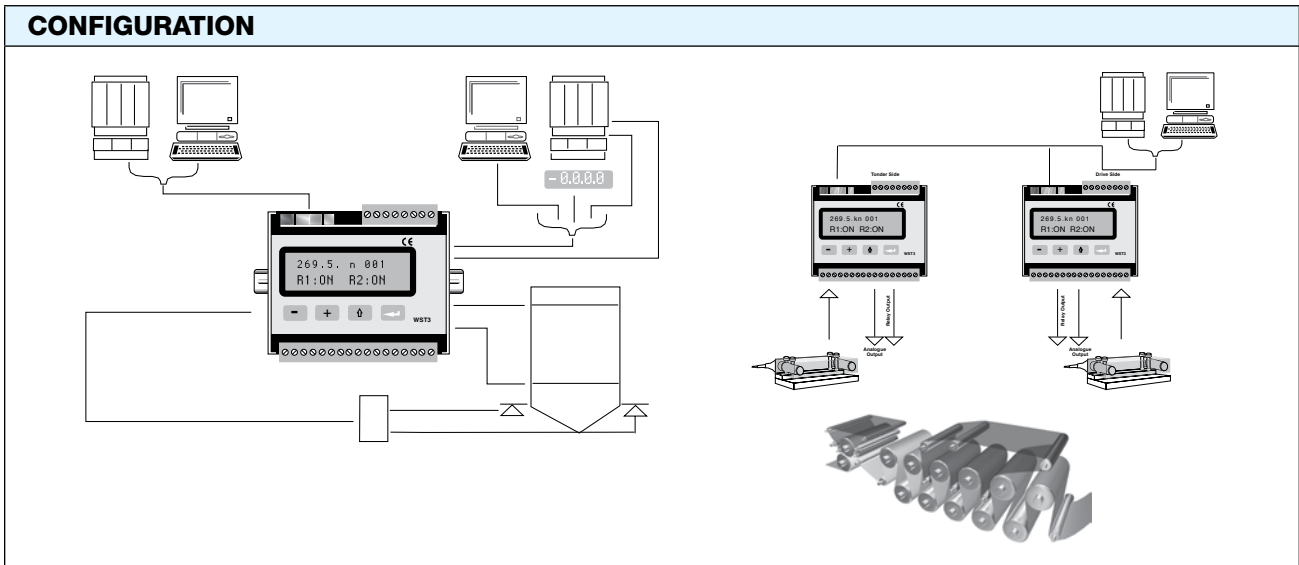

Transmitter

SPECIFICATIONS		PARAMETER	VALUE
PERFORMANCE		Resolution	8,300,000 counts
		Conversion Speed	0.5 to 300 Hz accuracy 0.015%
		Full Scale Range	±3.3 mV/V
		Non-Linearity	<0.005% of used range
		Excitation Voltage	8.8 VDC to 5.5 VDC with 1 to 8 of 350 Ω transducers, isolated 500 V
		No. of 350 Ω load cells	8 pcs (total load >45 Ω)
		Filter	0.05 to 75 Hz, type FIR, selectable bandwidth
		Offset, drift	<0.04 μV/°C
		Gain drift	<0.0015% of actual value/°C
		Calibration Methods	Data sheet, table, dead weight
ENVIRONMENTAL		Operating Temperature	-10°C to +50°C
		Storage Temperature	-25°C to +85°C
		Relative Humidity	95%
		IP Level	IP20
FRONT PANEL		Display Type and Size	2×16 character LCD display with backlight
		Keyboard	4 buttons for menu control and data entry
POWER SUPPLY		Voltage	24 VDC ±20%
		Power Consumption	8 W
		Isolation	Digital inputs common with power supply. Other parts 500 V
ANALOG OUTPUT		Type	Isolated 16-bit bipolar D/A converter
		Non-Linearity	<0.01% of used range
		Gain Drift	<0.003% of actual value/°C
		Filter	0.05 to 75 Hz, type FIR, selectable bandwidth
		Voltage	0-10 or ±10 VDC
		Load Data	min. 500 Ω
		Offset Drift	<0.35 mV/°C
		Current	0 to 20 mA, ±20 mA, 4 to 20 mA or -12 to 20 mA
		Load Data	max. 500 Ω
		Offset Drift	<0.7 μA/°C
		PARAMETER	VALUE
		DIGITAL INPUTS	
		Inputs	2 pcs (for tare and gross/net switching)
		Type and Load	24 VDC, 6 mA
		RELAY OUTPUTS	
		Number	2 pcs (each with 1 switching group)
		Load	max. 1 A, 30 VAC or VDC
		COMMUNICATION INTERFACE	
		Interface	RS-485 (two-wires or four-wires), isolated 500 V
		Protocol	MODBUS RTU or ASCII
		Baud Rate	Up to 115.2 kbaud
		Function	For control communication (MODBUS RTU) or external display (ASCII)
		FIELDBUS INTERFACE	
		Type	Profibus DP, modular slave
		Baud Rate	Up to 12 Mbit/s (autodetect)
		Compatibility	Compatible with Gate 3/Gate 3S (6/20 byte mapping)
		Function	Access to all data and functions in WST 3 through memory mapping
		Mapping	6 bytes in/out (Commands in. Weight and status out.) 20 bytes in/out (Commands and data in. Weight, status info and data out.) 86 bytes in/20 bytes out, extended 20 bytes mapping.
		MECHANICAL DATA	
		Dimensions	75 × 100 × 110 mm (H × W × D)
		Standard Mounting	DIN 46277 and DIN EN 50022
		Connector Type	Plug-in screw terminals, D-sub (Profibus)
		Certifications	CE, Profibus Certification

Subject to change without notice.



Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.