

Load Cell Tester

FEATURES

- System diagnostic and service
- Calibration function
- Testing of individual load cell
- Saving of up to 100 different systems
- Easy connection to Junction Box SL-5


APPLICATIONS

- All weighing and force

DESCRIPTION

A load cell tester with calibration and diagnostic functions. Easy to connect to any system and specially to junction box SL-5. Can store up to 100 different systems which can be recalled when needed.

Communication via RS 232 to allow bi-directional files transfer.

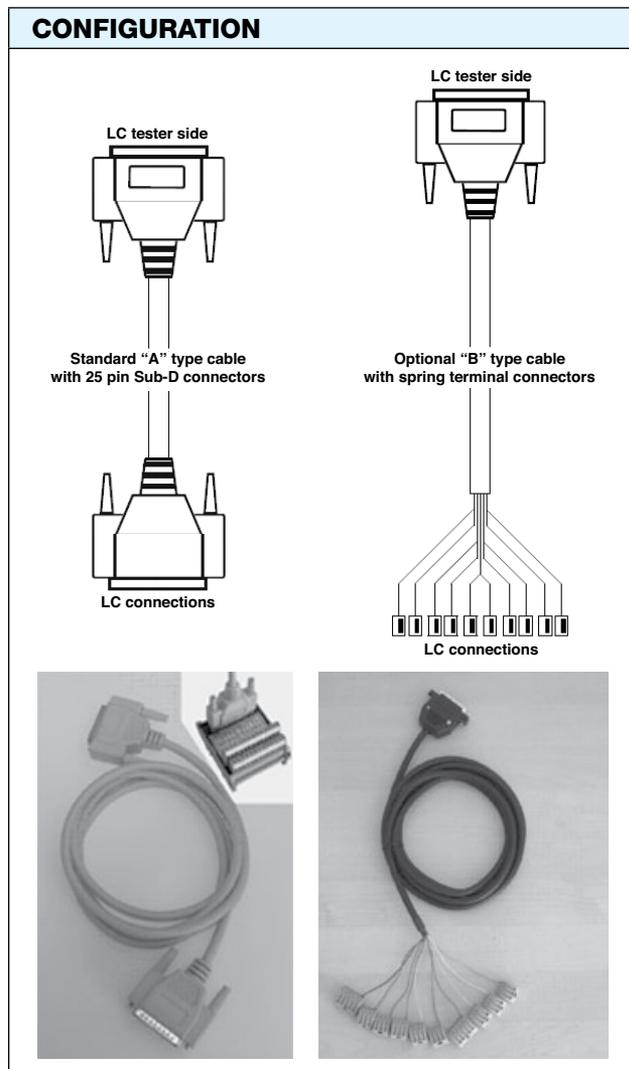

SPECIFICATIONS	
PARAMETER	VALUE
Power supply	4×1.5 V alkaline batteries AA size 4×1.2 V NiMH rechargeable batteries AA size
Power consumption	125 to 190 mA
Operating temperature range	-10 to +50°C
Storage temperature range	-20 to +70°C
Display	Graphic
Keyboard	16 keys on/off switch on keyboard
Overall dimensions	220×116/85×51 mm (L×W×H)
Weight	Approximately 500 g
Enclosure	Polyamide (UL94 - V2)
Protection degree (front)	IP54
Load cells connections	2 m cable with 25 pin sub-D 3 m cable with spring terminals
Load cells excitation voltage	5 VDC/60 mA (max 4×350 Ω LCs)
4 individual load cells channels with the following performance	
Linearity	<0.01% of full scale
Internal resolution	24 bit
Weight display resolution	Up to 50,000 counts
Input signal range	-4 to +4 mV/V
Decimal digits	Up to 3



Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.