

# **Remote Weight Display**

#### **FEATURES**

- · Large 6 digit Red LED display
- Digit height 57 mm
- Digit-for-digit replication from the transmitting BLH Nobel instrument
- Communication interface RS-232, RS-485, or 20 mA
- Baud rate and data format DIP switch selectable
- Environmental protection to IP65

#### **APPLICATIONS**

- Truck scales/weighbridges
- Warehouse scales
- Loading bays
- · All outdoor weighing applications

#### **OPTIONS**


• UL/TUV/UK/China/Japan plug

#### **DESCRIPTION**

BLH Nobel RD10 is a compact, digit-for-digit, high visibility remote display. The large LED display (57 mm digits) and wide viewing angle contribute to ease of reading at long distances.



The RD10 is environmentally protected to IP65 and is suitable for outdoor use. A standard serial interface (RS-232 or RS-485 or 20 mA current loop) allows easy connection between the local indicator and the RD10 at distances up to 600 m (RS-485). The RD10 is fully compatible with BLH Nobel instruments AST 3P, WST 3, TAD3, G4 and G5.

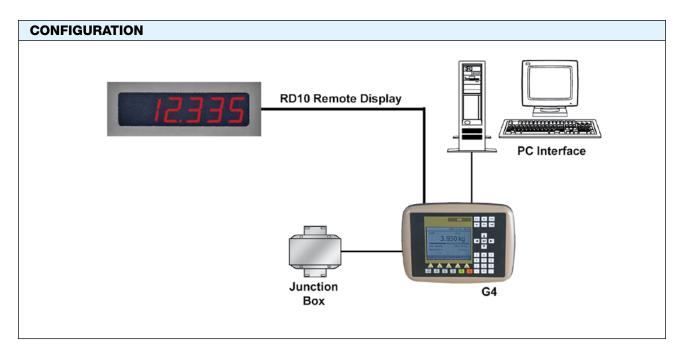

Document No.: 12346 Revision: 05-May-2016 Technical contact: <u>blhnobel.usa@vpgsensors.com</u>,
Europe: <u>blhnobel.eur@vpgsensors.com</u>, Asia: <u>blhnobel.asia@vpgsensors.com</u>



## Remote Weight Display

SPECIFICATIONS	
PARAMETER	VALUE
DISPLAY AND SERIAL INTERFACE	
Display	6 digits, LED, high visibility (57 mm, red)
Serial Interface	RS-232 or RS-485 or 20 mA current loop, terminated with screw type terminals
Baud Rate	DIP switch selectable 1200, 2400, 9600, 19200 baud
Character Format	DIP switch selectable: a) 7 data bits, even parity, 1 stop bit b) 8 data bits, no parity, 1 stop bit c) 8 data bits, even parity, 1 stop bit
Distance	RS-232 and 20 mA current loop = 50 m RS-485 = 600 m
ENVIRONMENTAL	
Operating Temperature	-10 to +40°C (14 to 104°F)
Storage Temperature	−20 to +55°C (4 to 158°F)
Relative Humidity	90% RH max., non condensing
ELECTRICAL	
Voltage	115/230 VAC +10%, 50-60 Hz
Power	7 W max.
ENCLOSURE, STAINLESS STEEL	
Dimensions	PCB: $328.3 \times 72 \times 40 \text{ mm L} \times \text{H} \times \text{D}$ Housing: $365 \times 130 \times 82 \text{ mm L} \times \text{H} \times \text{D}$
Protection	IP65
Wiring Connections	cable glands
Approval	CE

BLH Nobel is continually seeking to improve product quality and performance. Specifications may change accordingly.

www.blhnobel.com Technical contact: <u>blhnobel.usa@vpgsensors.com</u>, Document No.: 12346 2 Europe: <u>blhnobel.eur@vpgsensors.com</u>, Asia: <u>blhnobel.asia@vpgsensors.com</u> Revision: 05-May-2016



## **Legal Disclaimer Notice**

Vishay Precision Group, Inc.

### Disclaimer

ALL PRODUCTS. PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.

Document No.: 63999 Revision: 15-Jul-2014