

# WE BELIEVE IN INTEGRATION

## 1756-WM Dual-Channel Plug-In Weighing Module for Allen-Bradley 1756 ControlLogix Chassis PLCs



Encompass<sup>™</sup>  
Product Partner

A ROCKWELL AUTOMATION PARTNER  
Americas



SMART SOLUTIONS FOR  
DEMANDING INDUSTRIES

**BLH NOBEL**  
A VPG Brand

## Dual-Channel Plug-In Weighing Module for Allen-Bradley 1756 ControlLogix Chassis PLCs

Single channel accepts up to four 350 ohm load cells

Dual channel accepts up to eight 350 ohm load cells

Module update time — 1 millisecond


Calibration — software selectable / datasheet or dead weight

Operating temperature — 0°C to 60°C (32°F to 140°F)

The 1756-WM is a single slot, dual-channel weighing module that snaps into an Allen-Bradley® 1756 ControlLogix® chassis, making PLC integrations simple and easy. The module is powered directly from the I/O chassis backplane and needs no additional connections other than to the load cells. The weight data is directly communicated over the backplane. The 1756-WM unit is set up and calibrated with the Rockwell RSLogix 5000® Software and requires no external configuration utilities.

The Allen-Bradley ControlLogix PLC with 1756 ControlLogix chassis can be used in industries with process weighing, inventory or process control applications.

### TYPICAL INSTALLATION

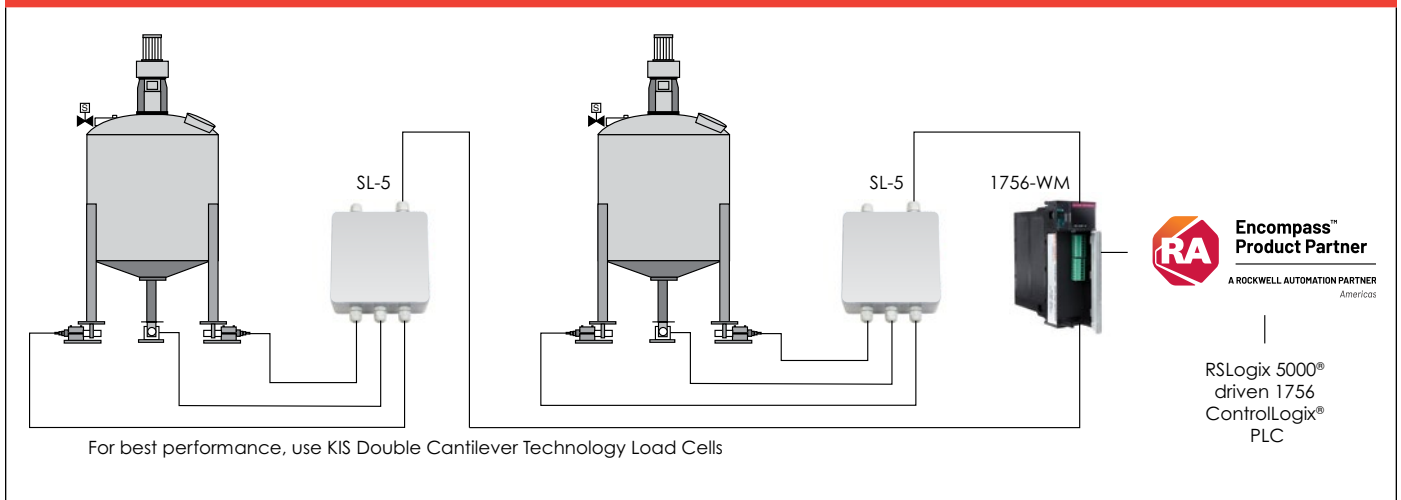

Allen-Bradley, ControlLogix and RSLogix 5000 are registered trademarks owned by Rockwell Automation.

**DISCLAIMER:** ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE. Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein. VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.** Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at [vpgsensors.com](http://vpgsensors.com). No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG. The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications. Product names and markings noted herein may be trademarks of their respective owners.