

## Load Cell Weigh Modules

### FEATURES

- Capacity range: 500, 1000, 2000, 5000 kg
- High-grade, welded, stainless-steel load beams
- Sealed to IP68 and IP69K standards for washdown service
- Semi-floating mounting
- OIML Certificate of Conformance
- ATEX and cFMus approved

### APPLICATIONS

- Storage tank weighing
- Bin/hopper scale conversion
- Level system measurement
- Platform scales


### DESCRIPTION

TankMount Weigh Modules are well suited for general industrial applications that require retrofitting an existing structure or hopper into a scale. TankMount uses a stainless steel beam transducer coupled with semi-floating mounting hardware. Correctly radially installed weigh modules result in a checkless system that is able to handle moderate degrees of thermal expansion and contraction.

TankMount weight modules come in capacity ranges of 500, 1000, 2000, 5000 kg with plated steel hardware as a standard, optionally in stainless steel. Load beam sealing meets IP68 and IP69K requirements.



### CONFIGURATION

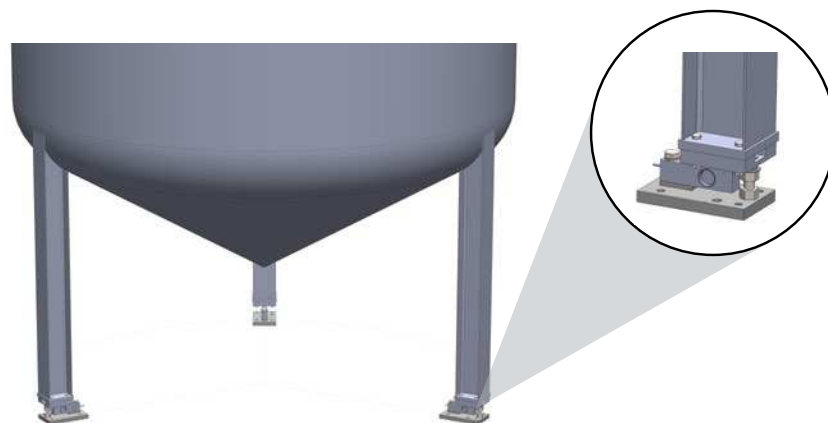


## Load Cell Weigh Modules




### SEMI FLOATING MODULE

#### Semi-Floating Modules

The semi-floating module design restricts lateral horizontal movement, but allows radial horizontal movement and a moderate degree of mounting plate angular movement to accommodate construction variances.

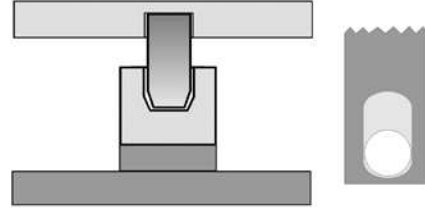

### OUTLINE DIMENSIONS

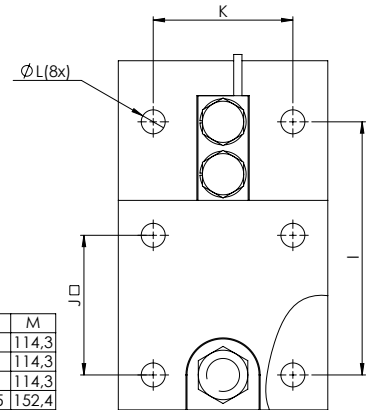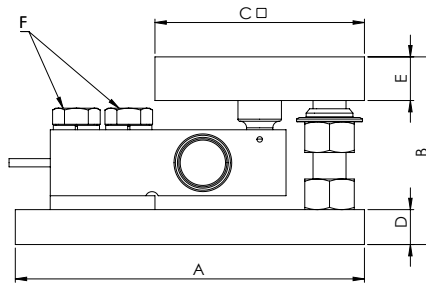

Range kg	A	B	C	D	E	F	G	H	I	J	K	L	M
500	203,2	104,8	114,3	19,05	25,4	M12 x 60	M16	M16x 90	152,4	88,9	88,9	11	114,3
1000	203,2	104,8	114,3	19,05	25,4	M12 x 60	M16	M16x 90	152,4	88,9	88,9	11	114,3
2000	203,2	104,8	114,3	19,05	25,4	M12 x 60	M16	M16x 90	152,4	88,9	88,9	11	114,3
5000	254	136,5	152,4	25,4	31,75	M20 x 80	M24	M24 x 110	184,15	101,6	101,6	17,5	152,4

Load Cell Weigh Modules

SPECIFICATIONS		
PARAMETER	VALUE	
<b>PERFORMANCE</b>		
Capacities	500, 1000, 2000, 5000	
Rated output (RO)	2.0 mV/V (±1%)	
Repeatability	0.01% RO	
Combined error	0.02% RO (beam only), 0.10% module assembly	
Zero balance	2.0% RO	
Creep (30 minutes)	0.03% RO	
Temperature effects on zero balance	0.0023% RO/°C	
Temperature effects on rated output	0.0010% RO/°C	
<b>ELECTRICAL</b>		
Recommended excitation	10 VDC (15 VDC max.)	
Input resistance	380 Ω (±10)	
Output resistance	355 Ω (±5)	
Cable length	5m, 6 conductor cable	
<b>TEMPERATURE</b>		
Safe temperature	-30 to +80°C	
Compensated range	-10 to +40 °C	
PARAMETER	VALUE	
<b>ADVERSE LOAD RATINGS</b>		
Safe overload	150% rated capacity	
Safe sideload	100% rated capacity	
Ultimate overload	300% rated capacity	
<b>MATERIAL</b>		
	Plated	Stainless
Load beam	17-4 PH stainless steel	17-4 PH stainless steel
Load button	17-4 PH stainless steel	17-4 PH stainless steel
Bases and load plates	zinc plated steel	304 stainless steel
Beam spacer	zink plated steel	304 stainless steel
Locating washer	304 stainless steel	304 stainless steel
<b>SEALING</b>		
Load beam	IP68 and IP69K	
<b>APPROVALS</b>		
ATEX, NTEP, OIML and cFMus certified versions are available upon request. For details contact blhnobel@vpgsensors.com.		

BLH Nobel is continually seeking to improve product quality and performance. Specifications may change accordingly.

## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at [vpgsensors.com](http://vpgsensors.com).

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.