


## Hermetically Sealed Bending Beam

### FEATURES

- Capacity range: 5.5, 11, 22, 34, 56, and 112 lb (25, 50, 100, 150, 250, 500 N)
- Precision accuracy and repeatability
- Environmentally sealed for washdown applications
- Fast, easy two-bolt installation
- cFMus and OIML approved
- OIML certification for 11 to 112 lb capacities

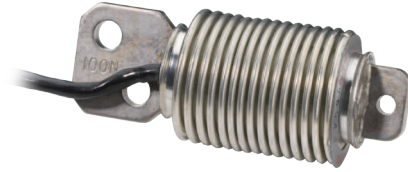

### APPLICATIONS

- Bench and portable scales
- Low capacity batching
- Medical weighing systems
- Pull/tear strength testing



### DESCRIPTION

The Alpha Beam is a low capacity differential bending beam transducer designed for use in a wide range of medical, industrial, and testing applications. Its unique features are a combination of superb accuracy and performance in a package that is very well sealed against moisture and solvents. Alpha Beams meet both OIML requirements for accuracy and IP67 requirements for moisture protection.


Rated force capacities range from approximately 5.5 to 112 pounds (25 to 500 Newtons). Within capacity range, Alpha Beams measure force bidirectionally, producing an output mV/V signal directly proportional to the force applied.

The heart of the patented Alpha Beam is the BLH Nobel developed SR-4<sup>®</sup> foil strain gage. Strain Gages are

electrically connected to form a balanced Wheatstone bridge. Compensation resistors maintain the accuracy of the bridge over a wide range of temperatures. The gaged element within the beam metal bellows is environmentally sealed against all adverse conditions, including water immersion.


Alpha Load Beams are certified in accordance with cFMus. They also are OIML tested and approved in accordance with paragraph 8.1 of the European Standard on Metrological aspects of nonautomatic weighing instrument EN 45501:1992 and by application of the OIML International Recommendation R 60 (Edition 1991).

### CONFIGURATION

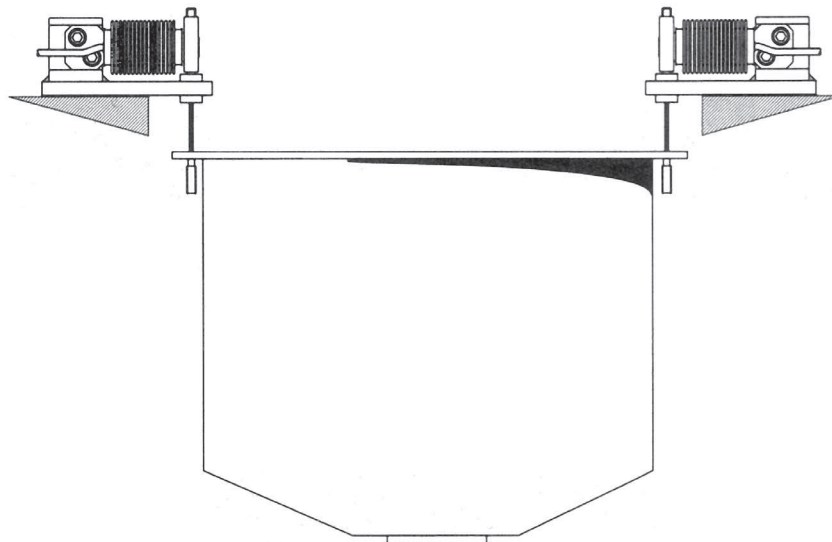

## Hermetically Sealed Bending Beam

### OUTLINE DIMENSIONS in mm (in)

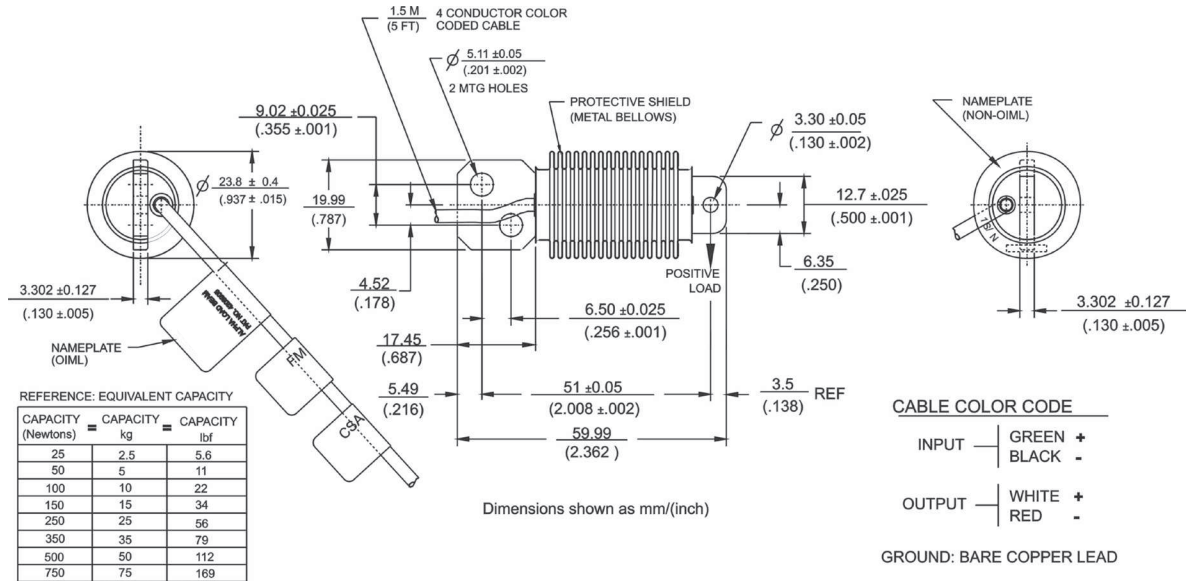

Hermetically Sealed Bending Beam

SPECIFICATIONS		PARAMETER	VALUE
<b>PERFORMANCE</b>		<b>ADVERSE LOAD RATINGS</b>	
<b>Capacities</b>	5.5,11, 22, 34, 56, 112 lb (25, 50, 100,150, 250, 500 N)	<b>Safe overload</b>	175% RO
<b>Rated output (RO)</b>	3 mV/V nominal	<b>Ultimate overload</b>	300% RO
<b>Nonlinearity</b>	0.02% RO	<b>MATERIAL</b>	
<b>Hysteresis</b>	0.02% RO	<b>Element</b>	Electroless nickel-plated beryllium copper
<b>Repeatability</b>	0.01% RO	<b>Bellows</b>	Tin-plated brass
<b>Creep (20 minutes)</b>	0.05% RO	<b>DEFLECTION AT RATED OUTPUT</b>	
<b>TEMPERATURE</b>		<b>11 to 56 lb</b>	0.01 in
<b>Safe range</b>	-15°F to +175°F	<b>112 lb</b>	0.017 in
<b>Compensated range</b>	0°F to +150°F	<b>SEALING</b>	
<b>Effect on zero balance</b>	0.0008% RO/°F	<b>Environmental protection</b>	IP67, all capacities
<b>Effect on rated output</b>	0.0008% load/°F	<b>MECHANICAL</b>	
<b>ELECTRICAL</b>		<b>Unit Weight</b>	approx. 2 oz
<b>Recommended excitation</b>	10 VAC-VDC		
<b>Maximum excitation</b>	20 VAC-VDC		
<b>Zero balance</b>	2.0% RO		
<b>Input resistance</b>	350 Ω (±3.5)		
<b>Output resistance</b>	350 Ω (±3.5)		
<b>Insulation Resistance</b>	2 GΩ		
<b>Electrical Connection</b>	5-ft, 4-conductor shielded cable		

BLH Nobel is continually seeking to improve product quality and performance. Specifications may change accordingly.

## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at [vpgsensors.com](http://vpgsensors.com).

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.