

Low Tension Transducer

FEATURES

- Capacity range: 20, 50, 100, 200, and 500 lb (9.1, 22.7, 45.4, 90.7, and 227 kg)
- Single bolt mounting with visual alignment marks for direct measurement of resultant force
- Repeatability better than 0.02% rated output
- Wide range of operating tensions (rangeability)
- Minimal deflection allows high operating speeds
- Factory calibrated for minimum start-up time
- Stainless steel construction with high overload capability

APPLICATIONS

- Converting equipment
- Winders/unwinders
- Coaters
- Laminators
- Printing presses

DESCRIPTION

LTT technology combines precision strain gage force transducers with dead shaft mounting options to produce the highest accuracy web tension measurement systems available. LTT series transducers, developed for low force web tension applications, incorporate a differential bending beam design with a full Wheatstone Bridge strain gage configuration. This design provides stable, accurate, and repeatable measurement over a wide range of operating tensions while virtually eliminating temperature drift.


All LTT capacities are equipped with mechanical overload protection.



Available with a mounting configuration for dead shaft applications (with horizontal or vertical support surfaces), the LTT can be rotated to measure the resultant tension force, not just a component of the force.


Factory calibration, with closely matched output signals, eliminates field calibration and costly recalibration after the initial setup. Zero and span settings remain stable for tension forces at the low end of wide rangeability applications. The full bridge design (as opposed to half bridge) provides moderate accuracy when using a single transducer on one end of the roll.

CONFIGURATION

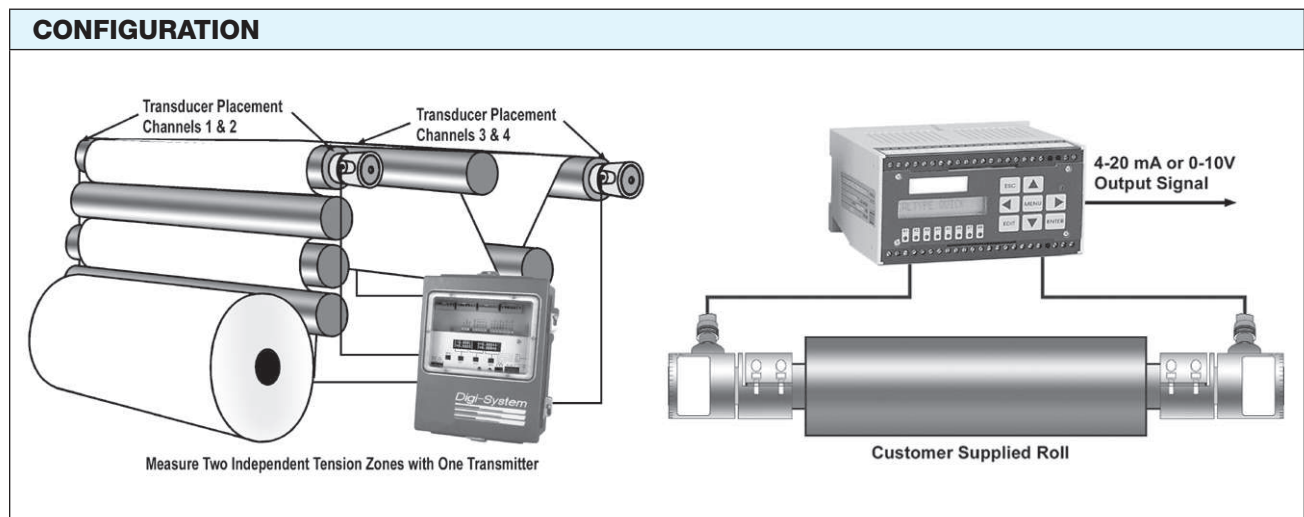

Low Tension Transducer

OUTLINE DIMENSIONS – LTT WITH DEAD SHAFT ADAPTER

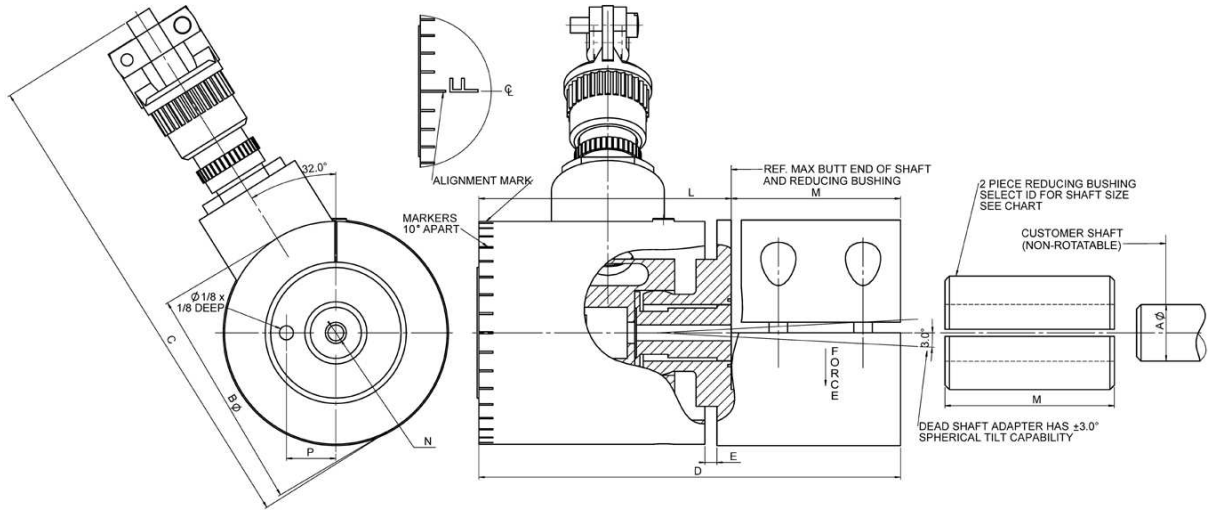

PART NAME	CAP (lbs)	A SHAFT (NOM)	BØ	C	D (MAX)	E	L (REF)	M	N	P
		1/2	1.97	4 3/8	3.75	0.11	2.25	1.50	1/2-20UNF-2B x 9/16 DEEP	0.438
LTT 20	20	5/8								
LTT 50	50	3/4								
LTT 100	100	7/8	3.47	5 29/32	5.68	0.16	3.68	2.00	5/8-18UNF-2B x 11/16 DEEP	0.750
		1								
		1								
		1 1/4								
LTT 200	200	1 1/2								
LTT 500	500	1 3/4								
		2								

NOTE:
1. ALL DIMENSIONS IN TABLE - IN INCHES.

CONNECTOR COLOR CODE

EXCITATION — GREEN (+) C
 — BLACK (-) B

OUTPUT — WHITE (+) D
 — RED (-) A

Low Tension Transducer

SPECIFICATIONS		PARAMETER	VALUE
PERFORMANCE (% RATED OUTPUT)		OVERLOAD RATING	
Rated capacities	20, 50, 100, 200, 500 lb (9.1, 22.7, 45.4, 90.7, and 227 kg)	Safe load	200% rated capacity
Rated output (RO)	2.000 mV/V \pm 0.25%	Safe side load	100% rated capacity
Nominal repeatability	0.02% RO	Ultimate load	300% (or better) rated capacity
Maximum combined error	0.05% RO	MATERIAL	
Zero balance	5.0% RO	All load cell parts	stainless steel
Creep (20 minutes)	0.03% RO	Bendix connector	cadmium plated aluminum
Temperature effects on zero balance	0.002% RO/ $^{\circ}$ F (0.0036% RO/ $^{\circ}$ C)	SEALING	
Temperature effects on rated output	0.002% of reading/ $^{\circ}$ F (0.0036% of reading/ $^{\circ}$ C)	Environmental class	IP67
ELECTRICAL		DEFLECTION AT RATED CAPACITY	
Input resistance	350 Ω \pm 3 Ω	20 lb	0.0055 in
Input output resistance	350 Ω \pm 3 Ω	50 lb	0.0045 in
Recommended excitation	10 VAC/VDC	100 lb	0.0035 in
Maximum excitation	15 VAC/VDC	200 lb	0.0210 in
TEMPERATURE		500 lb	0.0148 in
Operating range	-40 to 220 $^{\circ}$ F (-40 to -105 $^{\circ}$ C)		
Compensated range	+15 to 130 $^{\circ}$ F (-10 to 65 $^{\circ}$ C)		

Note: Transducer axis misalignment \pm 3 $^{\circ}$ max.

Note: Environmental sealing optionally available; may affect measured accuracy by 1 ounce or less

Note: Install Intrinsically safe systems with Drawing # 468872-1

BLH Nobel is continually seeking to improve product quality and performance. Specifications may change accordingly.

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.