

## Web Tension Transmitter

### FEATURES

- Ultra high speed 120 update-per-second, isolated 4–20 mA current output
- Compact, full function web tension indication/control
- DIN Rail mount capability
- 700,000 count resolution; eight millisecond sample rate
- Two (2) load cells per tension zone
- 8 open collector discrete setpoint outputs

### APPLICATIONS

- Paper machines
- Film/foil/filament converting
- Textile web measurement
- Roofing machines

### DESCRIPTION

PS-2010T Transmitters offer precision web tension measurement for applications that require a small, full function indicator/controller. Packaged much like a mini-PLC “brick”, units can be DIN rail mounted inside any existing cabinet. The standard RS-485 serial port interfaces easily with PLC/DCS systems using conventional ASCII or optional Modbus RTU protocol. A high speed, high resolution, isolated (16 bit) 4–20 mA analog output provides the perfect input for a brake/clutch motor controller.

Simple set-up and calibration is performed using the integral LCD display and keypad assembly. Digital calibration techniques eliminate the need for costly, cumbersome machine “strapping” in most applications




and greatly simplify the calibration of systems that do require loading. Standard units also include Dynamic Digital Filtering and eight setpoints.

Both the front panel display and the 16 bit analog output are updated every 8.3 ms (120 updates per second). This rate provides precise control for web applications running at 2000 ft per minute and faster.

Quick calibration and setup procedures save time, money, and even field service calls. On-line diagnostics continuously monitor system performance and alert service personnel to potential problems before they happen.

The 2010 offers a cost effective, reliable solution for the OEM and system integrator.

### CONFIGURATION

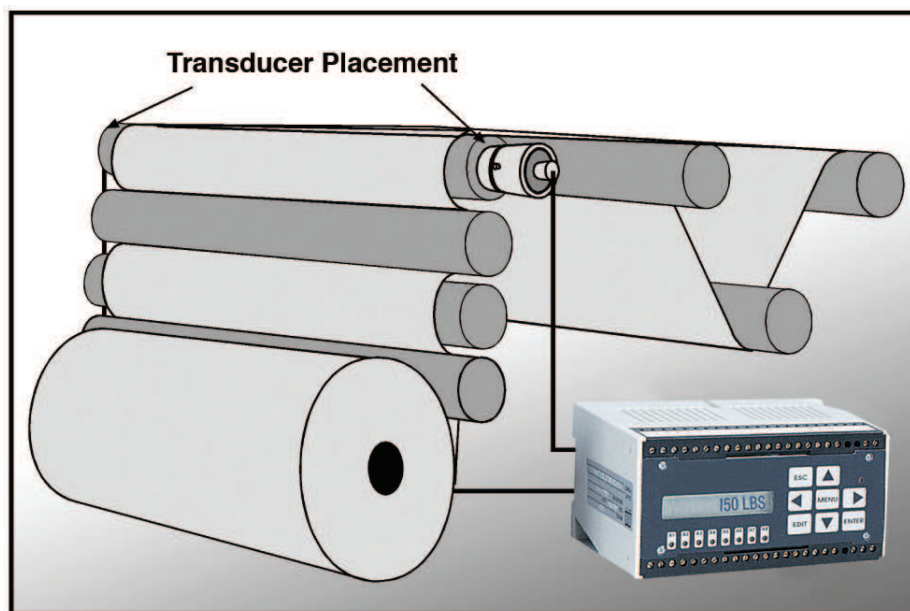


## Web Tension Transmitter

SPECIFICATIONS		PARAMETER	VALUE
<b>PERFORMANCE</b>		<b>Resolution</b>	1,048,576 total counts
<b>Displayed Resolution</b>			700,000 counts
<b>Conversion Speed</b>			8.3 to 133 ms (5-selections) (7.5 to 120 updates/s)
<b>Displayed Sensitivity</b>			0.05 $\mu$ V per count
<b>Noise</b>			0.4 $\mu$ V per count (min. filt setting)
<b>Full Scale Range</b>			$\pm$ 3.5 mV/V
<b>Bipolar Direction</b>			$\pm$ 100% full scale
<b>Input Impedance</b>			10 m $\Omega$ min.
<b>Excitation Voltage</b>			10 VDC @ 240 mA
<b>Linearity</b>			$\pm$ 0.003% full scale
<b>Step Response</b>			one conversion
<b>TRANSDUCER SUPPLY</b>			
<b>Excitation</b>			10 VDC
<b>Gage Resistance</b>			350 $\Omega$
<b>Gage Type</b>			foil (2–3 mV/V), full bridge
<b>Number of Load Cells</b>			two (2) cells per tension zone
<b>ENVIRONMENT</b>			
<b>Operating Temperature</b>			–10 to 50°C (15 to 122°F)
<b>Storage Temperature</b>			–25 to 80°C (–10 to 175°F)
<b>Temp Coefficient Zero</b>			$\pm$ 2 ppm/°C
<b>Temp Coefficient Span</b>			$\pm$ 7 ppm/°C
<b>Operating Humidity</b>			95% RH non-condensing
<b>ELECTRICAL</b>			
<b>Voltage (AC)</b>			117/230 VAC $\pm$ 15% @ 50/60 Hz
<b>Voltage (DC)</b>			24 VDC @ 1 A
<b>Power</b>			12 W typical, 18 W max.
<b>DISPLAY</b>			
<b>Type</b>			single line LCD
<b>Active Digits</b>			16 digit alpha numeric .24 in high
<b>Display Units</b>			PLI, LB, KG, N, N/M
<b>ANALOG OUTPUT; 16 BIT D-A</b>			
<b>Current</b>			4–20 mA – 500 $\Omega$ max.
		<b>PARAMETER</b>	<b>VALUE</b>
		<b>COMMUNICATIONS</b>	
		<b>Serial RS485/422</b>	full or half duplex ASCII protocol 7 or 8 data bits – selectable odd, even or no parity –selectable Baud Rates 300, 600, 1200, 2400, 4800, 9600, or 19200
		<b>SPECIAL INTERFACE (OPTIONAL)</b>	
		<b>Modbus RTU</b>	Slave
		<b>REMOTE INPUTS – 4</b>	
		<b>Type</b>	TTL or dry contact closure
		<b>Functions</b>	total tension, zero and print
		<b>Low</b>	0.0 to 0.4 VDC
		<b>High</b>	4.0 to 24 VDC
		<b>SET POINT OUTPUTS – 8</b>	
		<b>Type</b>	open collector (current sinking)
		<b>Operating Voltage</b>	5–35 VDC
		<b>ON Voltage</b>	1.2 VDC @ 35 mA 0.8 VDC @ 1 mA
		<b>OFF State Leakage</b>	0.04 A @ 35 VDC
		<b>Power</b>	external supply required
		<b>ENCLOSURE MOUNTING DIMENSIONS</b>	
		<b>Standard Unit</b>	5.8×3.0×4.3 in L×W×D DIN rail or wall mount weight approx 3 lb
		<b>Single Unit NEMA 4X Enclosure</b>	11.73×9.85×6.13 in L×W×D with single DIN rail mounting strip
		<b>Double Unit NEMA 4X Enclosure</b>	13.7×11.8×6.5 in L×W×D with two DIN rail mounting strips
		<b>MATERIALS</b>	
		<b>Enclosure (standard)</b>	polycarbonate

Web Tension Transmitter

**OUTLINE DIMENSIONS**

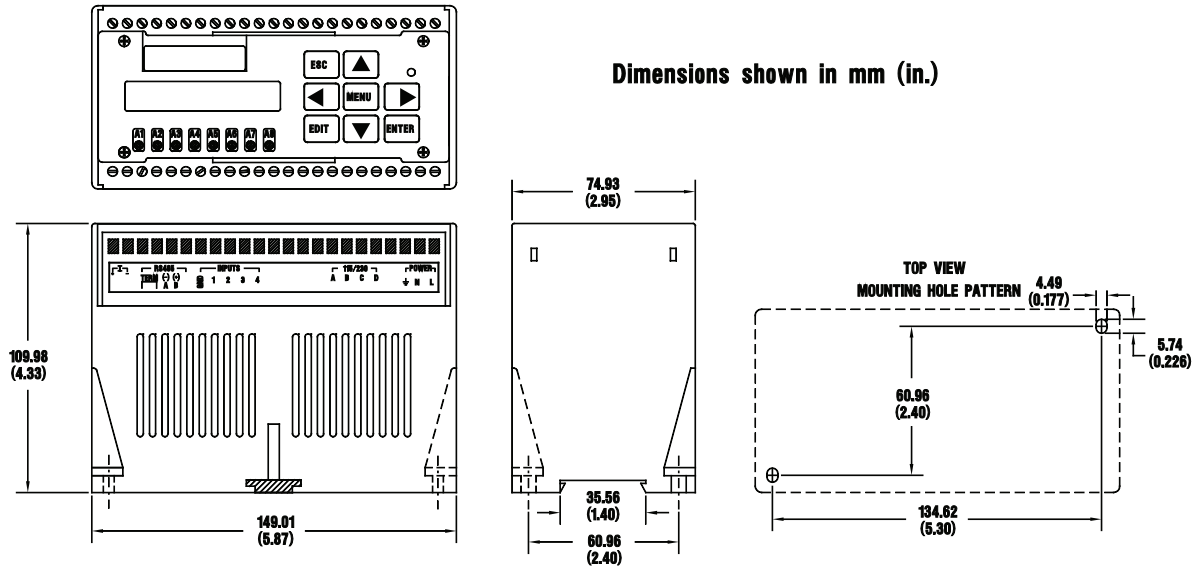



## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at [vpgsensors.com](http://vpgsensors.com).

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.