


Furnace Strip Tension Measurement Unit

FEATURES

- For strip tension measurements in a continuous furnace
- Accuracy better than 0.1% of the maximum strip tension
- Non sensitive to thermal expansion of the deflecting roller
- Non sensitive to side load forces
- Based around standard KIS loadcells, low spare part cost
- Easy maintenance and calibration
- Custom design adapted to existing bearing blocks, no need of adapter plates

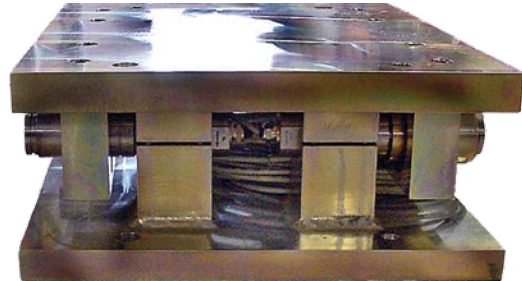

APPLICATIONS


- Strip tension measurement in continuous furnaces for hot galvanizing lines and annealed lines

DESCRIPTION

The PST has been specially designed for strip tension measurement into a continuous furnace for high accuracy at both maximum and minimum tension.

The PST tensiometer is using four standards KIS load cells into a specific arrangement which makes the PST tensiometer totally non sensitive to axial forces and bending moments induced by the deflecting rollers due to high thermal expansion.


OUTLINE DIMENSIONS

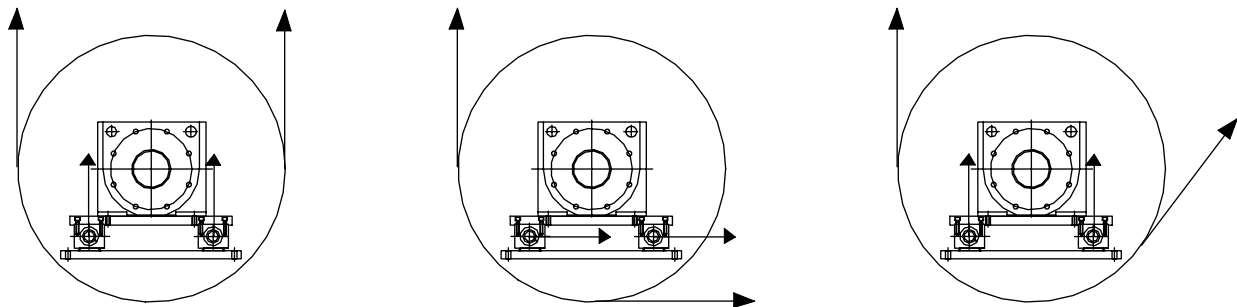

What ever is the profile of the strip tension on the measuring roller, what ever is the mechanical mounting of the measuring roller on the new or existing furnace, the PST will be mechanically adapted to the customer application

Furnace Strip Tension Measurement Unit

APPLICATION EXAMPLE

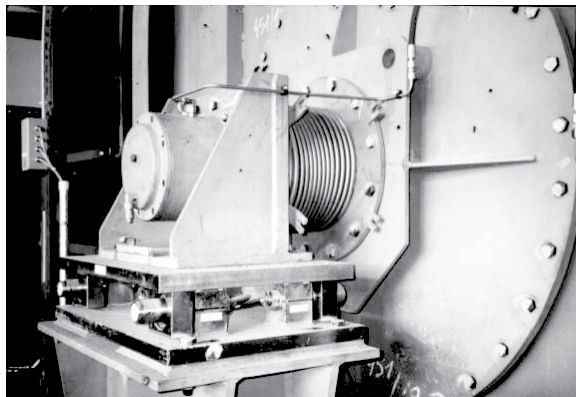

Tensiometer PST-80 kN under a furnace roller

SPECIFICATIONS

PARAMETER	VALUE
Capacity	20, 40, 80, 120 and 200 kN
Accuracy error/repeatability	Better than 0.1% RO
Accuracy error/repeatability (with one dummy load cell)	Better than 0.5% RO
Input voltage, recommended	5–10 VDC or VAC
Input voltage, maximum	18 VDC or VAC
Rated output (RO)	2 mV/V
Temperature range	–40 to +80°C (100°C available as option)
Electrical connection	Shielded four conductor cable or connector
Materials	Load cells stainless steel, mechanics yellow chromate zinc plated or stainless steel

BLH Nobel is continually seeking to improve product quality and performance. Specifications may change accordingly.



Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.